POWER POINT PRESENTATION ON CONTROL SYSTEMS

Dr. T. Rajesh, Asst. Professor Mr. P. Venubabu, Asst. Professor, EEE Dept., JBIET

UNIT - I INTRODUCTION TO CONTROL SYSTEMS

Introduction

System – An interconnection of elements and devices for a desired purpose.

Control System – An interconnection of components forming a system configuration that will provide a desired response.

Process – The device, plant, or system under control. The input and output relationship represents the cause-and-effect relationship of the process.



Process to be controlled.

Chapter 1: Introduction to Control Systems Objectives

In this chapter we describe a general process for designing a control system.

A control system consisting of interconnected components is designed to achieve a desired purpose. To understand the purpose of a control system, it is useful to examine examples of control systems through the course of history. These early systems incorporated many of the same ideas of feedback that are in use today.

Modern control engineering practice includes the use of control design strategies for improving manufacturing processes, the efficiency of energy use, advanced automobile control, including rapid transit, among others.

We also discuss the notion of a design gap. The gap exists between the complex physical system under investigation and the model used in the control system synthesis.

The iterative nature of design allows us to handle the design gap effectively while accomplishing necessary tradeoffs in complexity, performance, and cost in order to meet the design specifications.

Introduction

Open-Loop Control Systems


utilize a controller or control actuator to obtain the desired response.



Open-loop control system (without feedback).


Closed-Loop Control Systems

utilizes feedback to compare the actual output to the desired output response.

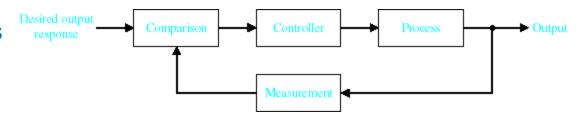


Closed-loop feedback control system (with feedback).


Multivariable Control System

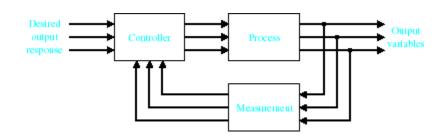


Greece (BC) – Float regulator mechanism Holland (16th Century) – Temperature regulator

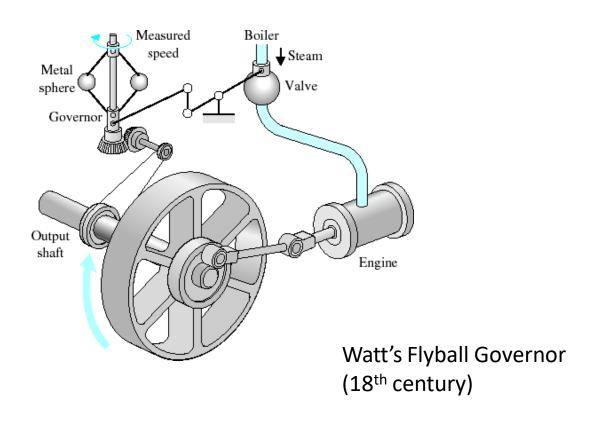

Water-level float regulator

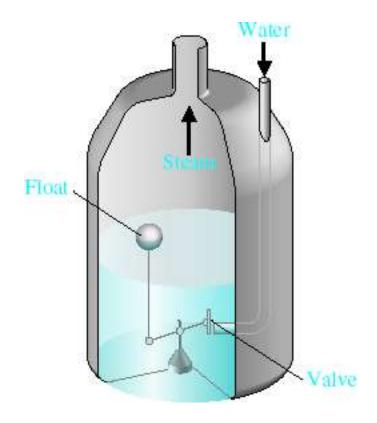

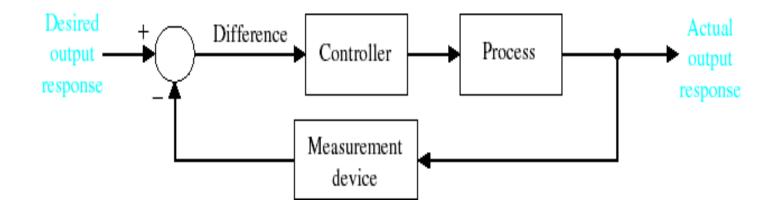

Closed-loop feedback system.

18th Century James Watt's centrifugal governor for the speed control of a steam engine.

1920s Minorsky worked on automatic controllers for steering ships.

1930s Nyquist developed a method for analyzing the stability of controlled systems


1940s Frequency response methods made it possible to design linear closed-loop control systems

1950s Root-locus method due to Evans was fully developed

1960s State space methods, optimal control, adaptive control and


1980s Learning controls are begun to investigated and developed.

Present and on-going research fields. Recent application of modern control theory includes such non-engineering systems such as biological, biomedical, economic and socio-economic systems

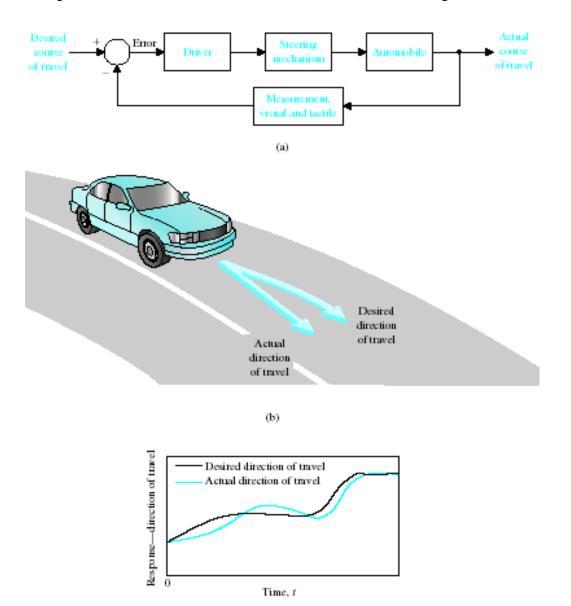


(c)

- (a)Automobile steering control system.
- (b)The driver uses the difference between the actual and the desired direction of travel
- to generate a controlled adjustment of the steering wheel.
- (c) Typical directionof-travel response.

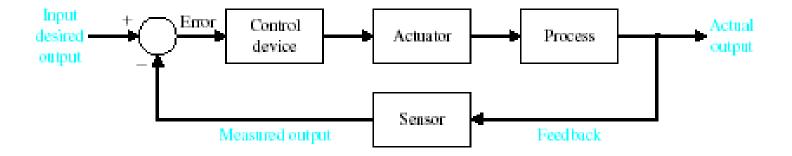



A negative feedback system block diagram depicting a basic closed-loop control system.

The control device is often called a "controller."

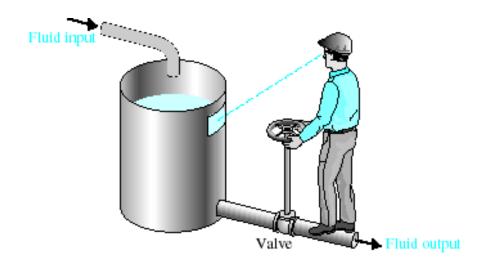


A manual control system for regulating the level of fluid in a tank by adjusting the output valve. The operator views the level of fluid through a port in the side of the tank.

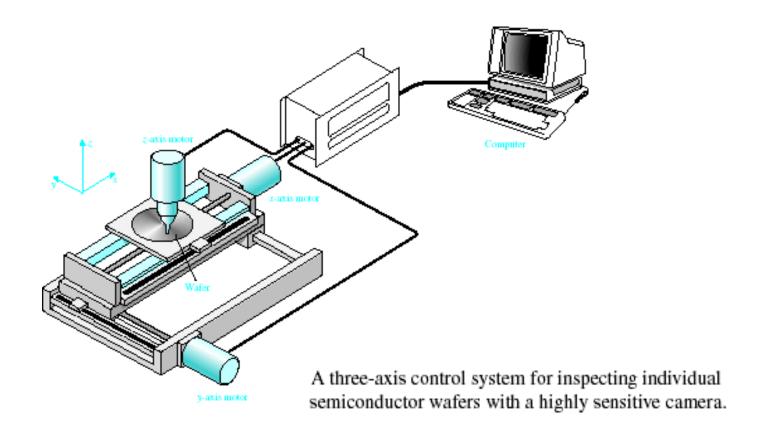


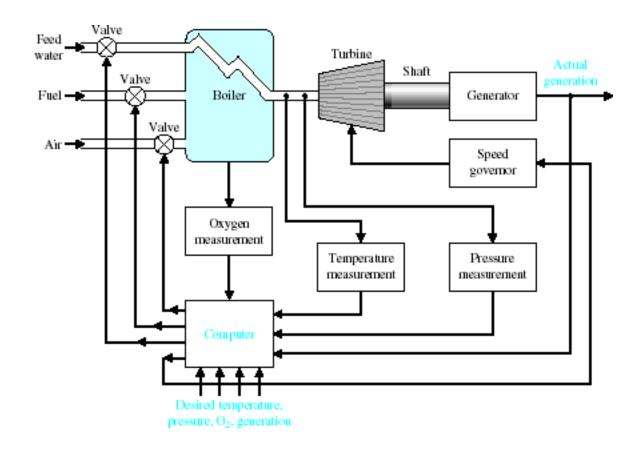

Coordinated control system for a boiler-generator.

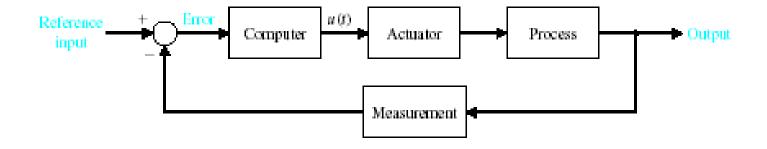


A computer control system.

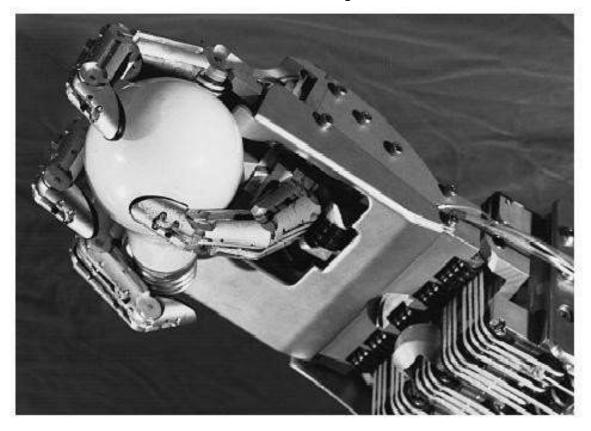


The Utah/MIT Dextrous Robotic Hand: A dextrous robotic hand having 18 degrees of freedom, developed as a research tool by the Center for Engineering Design at the University of Utah and the Artificial Intelligence Laboratory at MIT. It is controlled by five Motorola 68000 microprocessors and actuated by 36 high-performance electropneumatic actuators via high-strength polymeric tendons. The hand has three fingers and a thumb. It uses touch sensors and tendons for control.

(Photograph by Michael Milochik. Courtesy of University of Utah.)

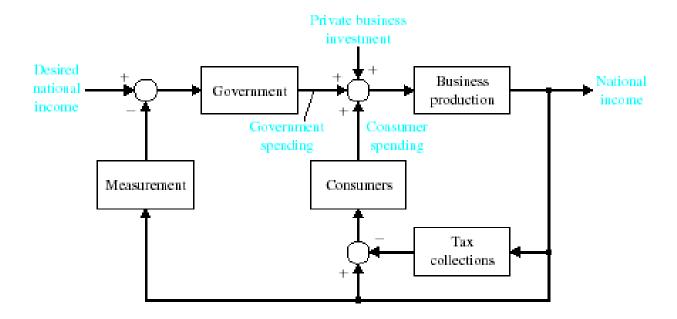


A feedback control system model of the national income.

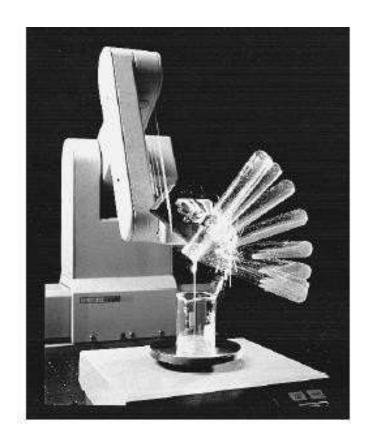

A laboratory robot used for sample preparation. The robot manipulates small objects, such as test tubes, and probes in and out of tight places at relatively high speeds [41]. (© Copyright 1993 Hewlett-Packard Company. Reproduced with permission.)


The Future of Control Systems

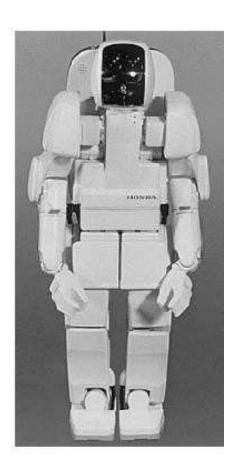

The Honda P3 humanoid robot. P3 walks, climbs stairs and turns corners.


Photo courtesy of American Honda Motor, Inc.


The Future of Control Systems

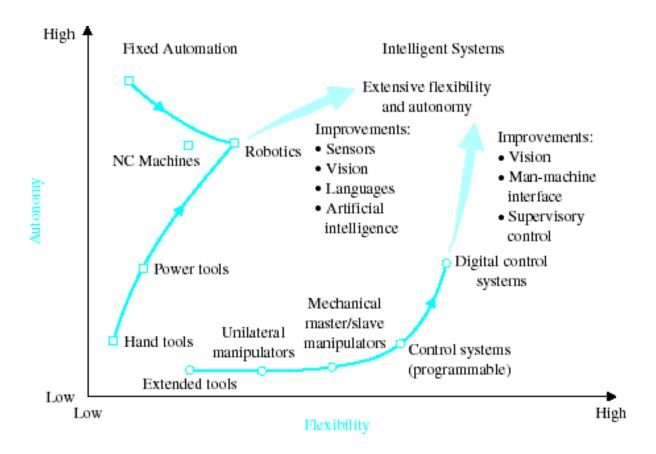


Future evolution of control systems and robotics.

Control System Design

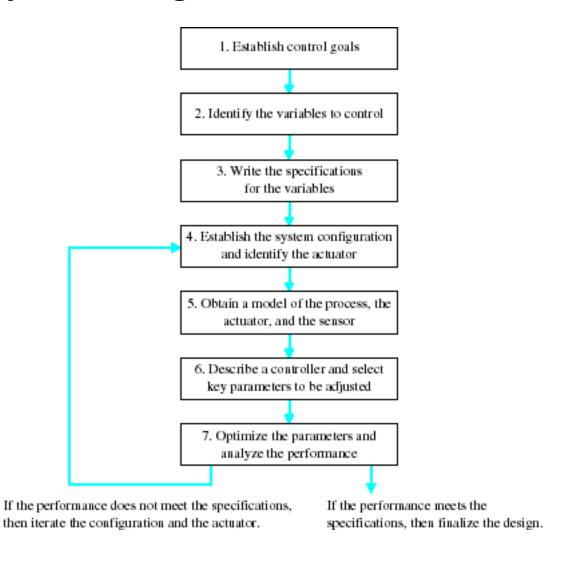

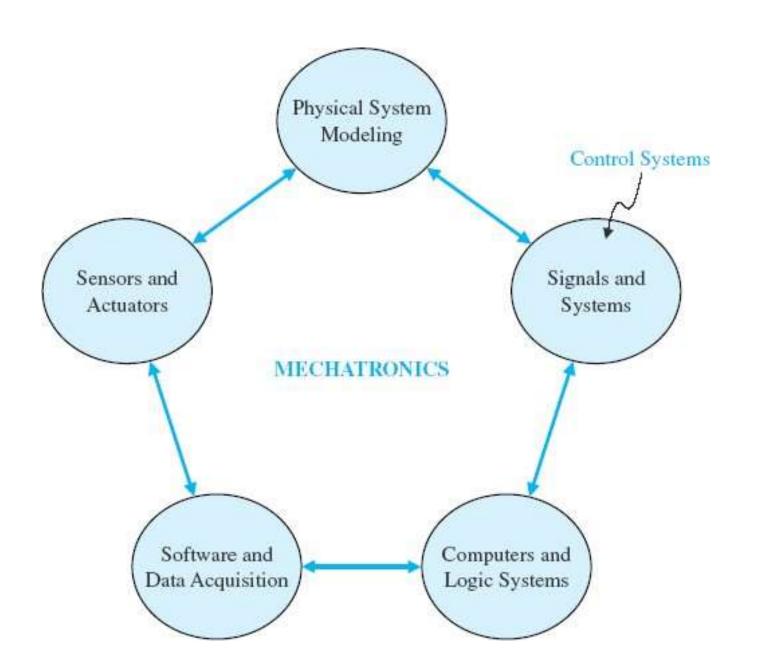

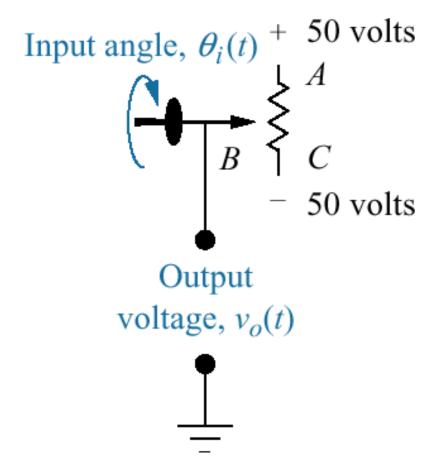



ELECTRIC SHIP CONCEPT


Vision **Electrically** Reconfigurable All Ship Integrated Electric Power Ship System Technology Increasing Affordability and Military Capability Insertion Reduced manning Electric Drive Warfighting Automation Reduce # of Prime **Capabilities** Eliminate auxiliary Movers systems (steam, Fuel savings **Main Power** hydraulics, compressed Reduced maintenance **Distribution** air) **Prime** Motor **Propulsion** Generator Mover Motor Drive Ship Power **Service** Conversion **Power** Module


CVN(X) FUTURE AIRCRAFT CARRIER



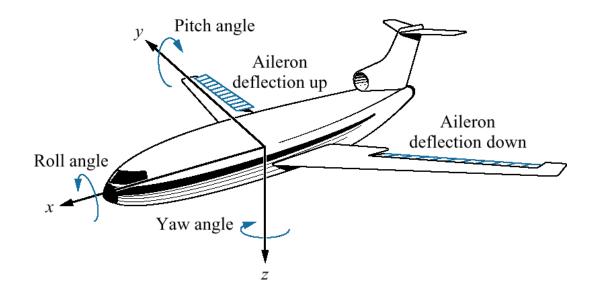


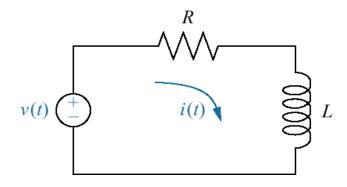


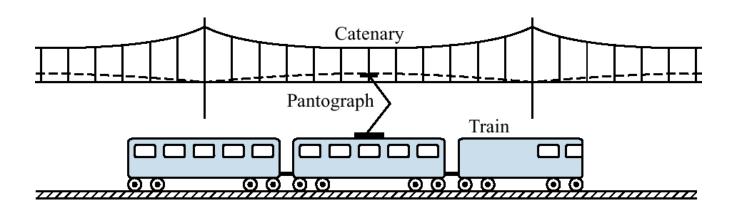

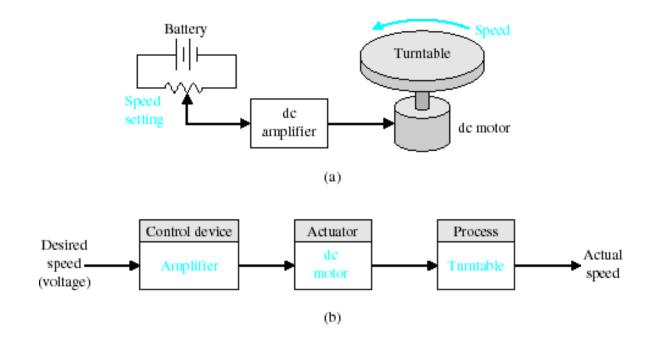



(a) Open-loop (without feedback) control of the speed of a turntable.(b) Block diagram model.

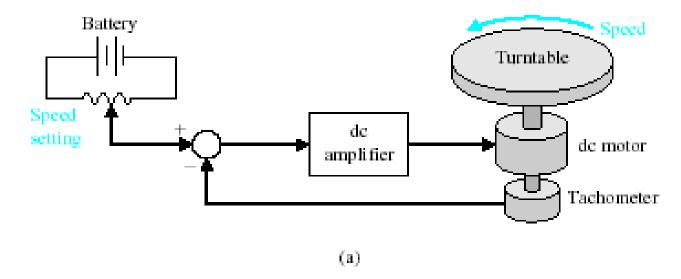


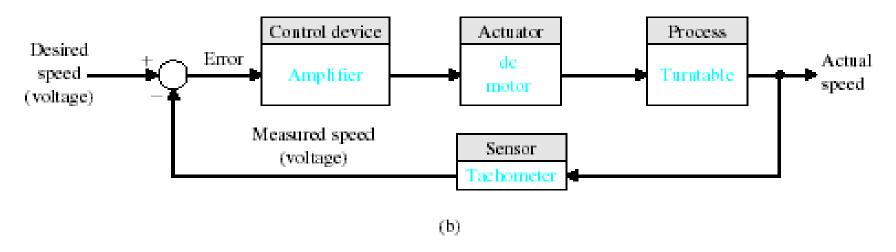


(a) Closed-loop control of the speed of a turntable.(b) Block diagram model.

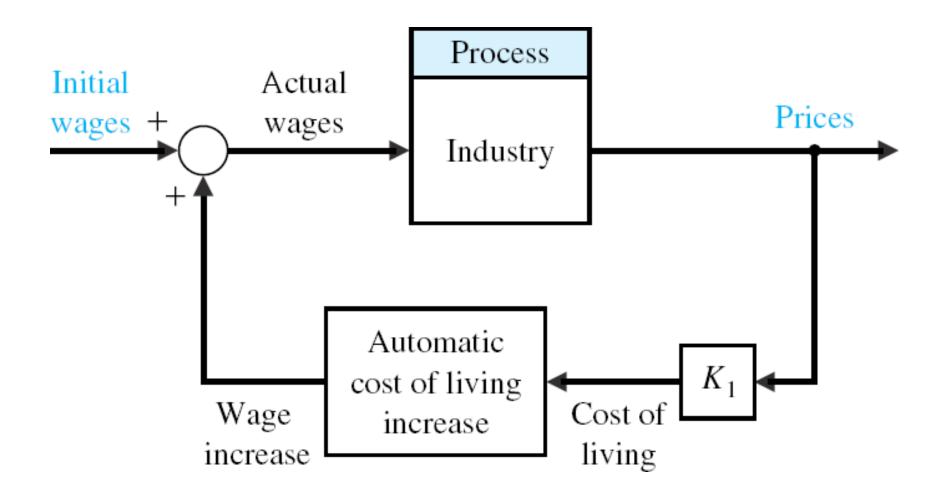

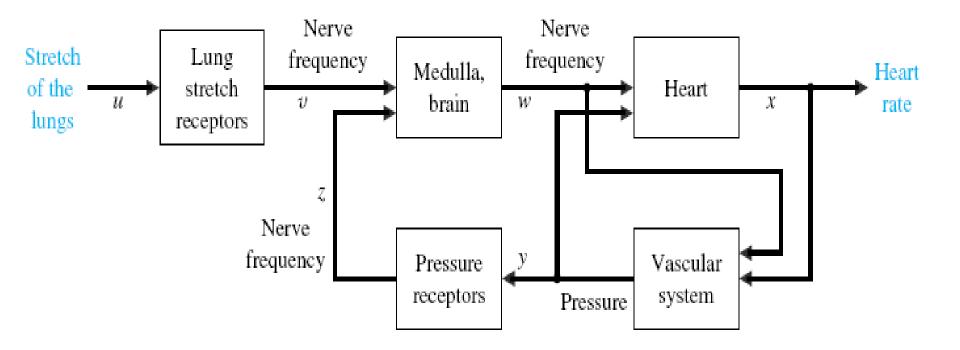

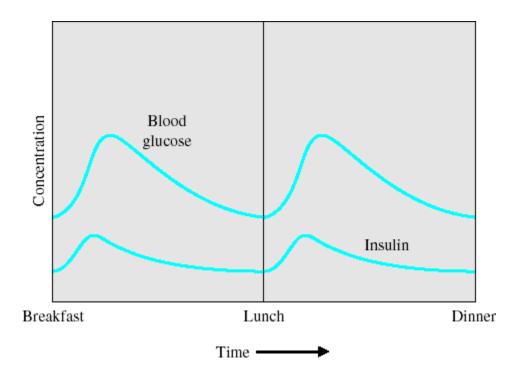


The blood glucose and insulin levels for a healthy person.

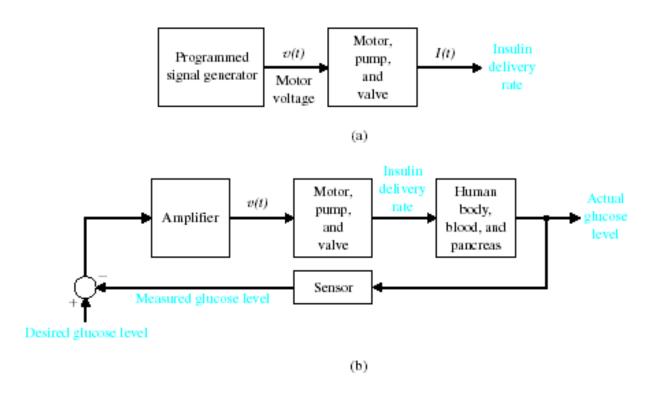


(a) Open-loop (without feedback) control and(b) closed-loop control of blood glucose.


Sequential Design Example

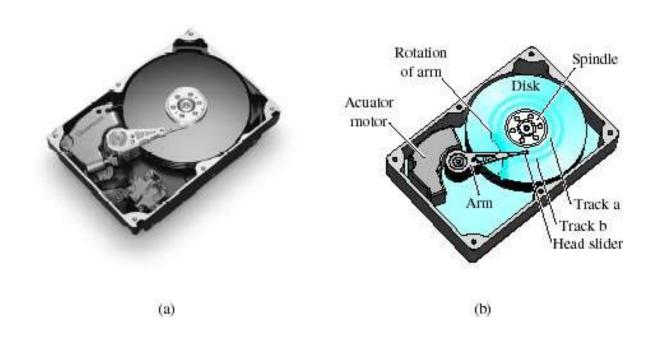

(a) A disk drive ©1999 Quantum Corporation. All rights reserved.(b) Diagram of a disk drive.

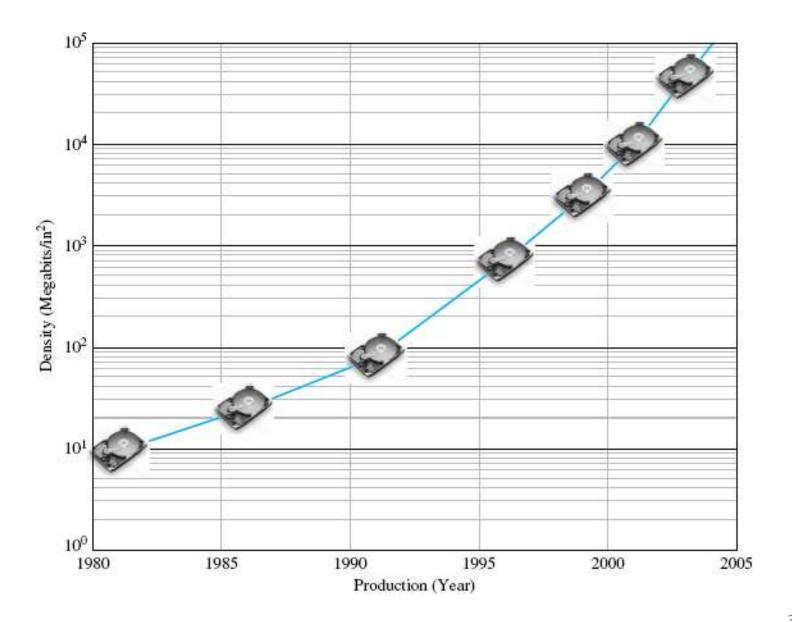

Sequential Design Example

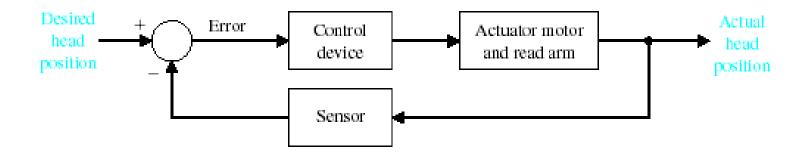


Closed-loop control system for disk drive.


UNIT-II

BLOCK DIAGRAM REDUCTION OF MULTIPLE SYSTEMS


Components of a block diagram for a linear, time-invariant system

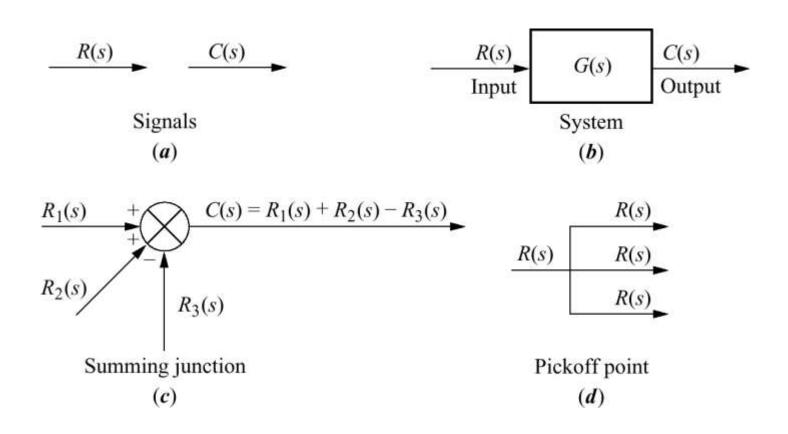

a. Cascaded subsystems;b. equivalent transfer function

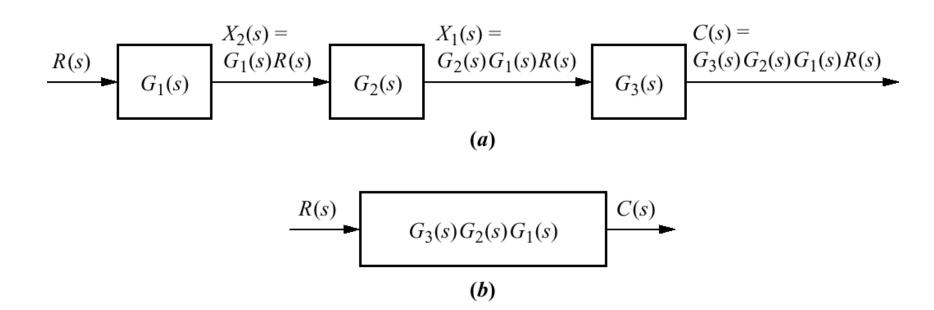

- a. Parallel subsystems;
- b. equivalent transfer function

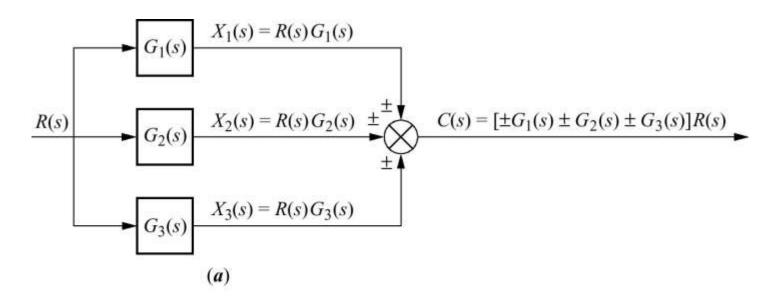

a. Feedback control system; Input transducer Controller Plant b. simplified model; C(s)E(s)R(s) $G_1(s)$ $G_2(s)$ $G_3(s)$ c. equivalent transfer function Input Output Actuating signal (error) $H_2(s)$ $H_1(s)$ Feedback Output transducer (a) Plant and controller E(s)C(s)R(s)G(s)Input Actuating Output signal (error) H(s)Feedback (b) R(s)G(s)C(s) $1 \pm G(s)H(s)$ Input Output (c)

Figure 5.7: Block diagram algebra for summing junctions

equivalent forms for moving a block

- a. to the left past a summing junction;
- b. to the right past a summing junction


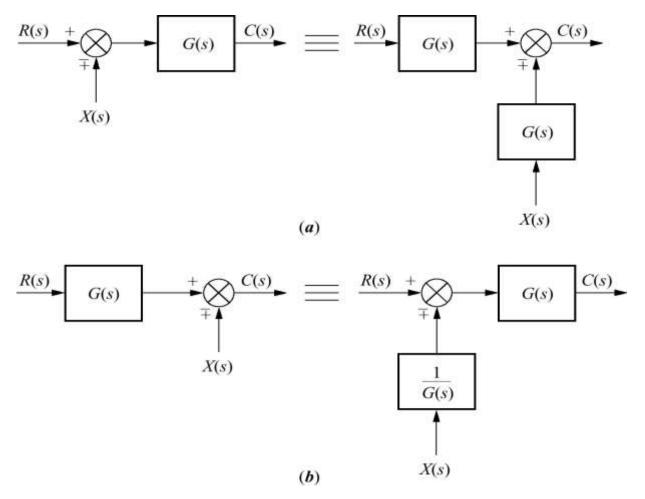


Figure 5.8: Block diagram algebra for pickoff points


equivalent forms for moving a block

- a. to the left past a pickoff point;
- b. to the right past a pickoff point

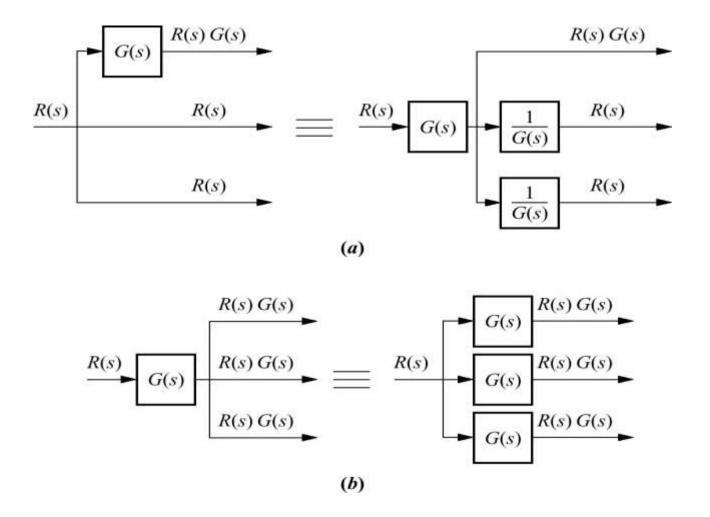

Block diagram reduction via familiar forms for Example 5.1


Problem: Reduce the block diagram shown in figure to a single transfer function

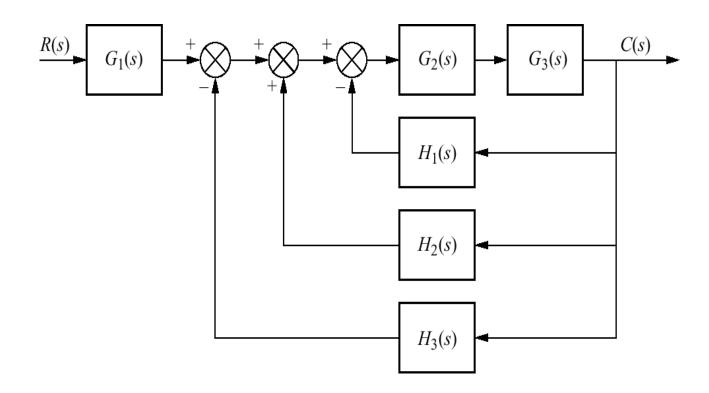

Block diagram reduction via familiar forms for Example 5.1 Cont.

Steps in solving Example 5.1:


- a. collapse summing junctions;
- b. form equivalent cascaded system in the forward path
- c. form equivalent parallel system in the feedback path;
- d. form equivalent feedback system and multiply by cascadedG₁(s)

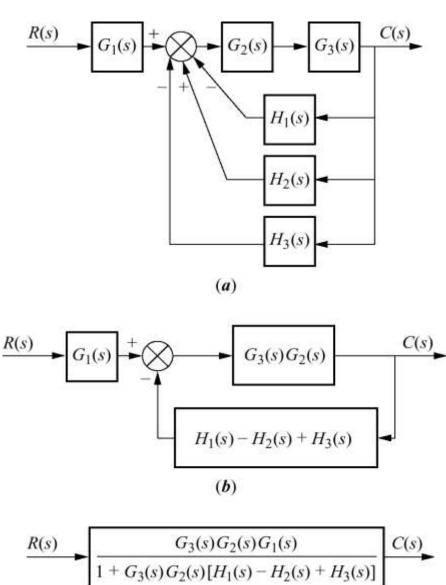

$$\begin{array}{c|c}
R(s) & \hline G_3(s)G_2(s)G_1(s) & C(s) \\
\hline
1 + G_3(s)G_2(s)[H_1(s) - H_2(s) + H_3(s)] & \\
\hline
(c) & 45
\end{array}$$


Block diagram reduction by moving blocks Example 5.2

Problem: Reduce the block diagram shown in figure to a single transfer function

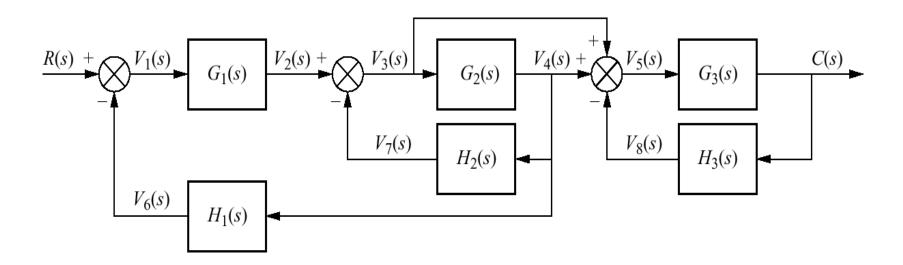


Steps in the block diagram reduction for Example 5.2

- a) Move $G_2(s)$ to the left past of pickoff point to create parallel subsystems, and reduce the feedback system of $G_3(s)$ and $H_3(s)$
- b) Reduce parallel pair of $1/G_2(s)$ and unity, and push $G_1(s)$ to the right past summing junction
- c)Collapse the summing junctions, add the 2 feedback elements, and combine the last 2 cascade blocks
- d)Reduce the feedback system to the left
- e)finally, Multiple the 2 cascade blocks and obtain final result.

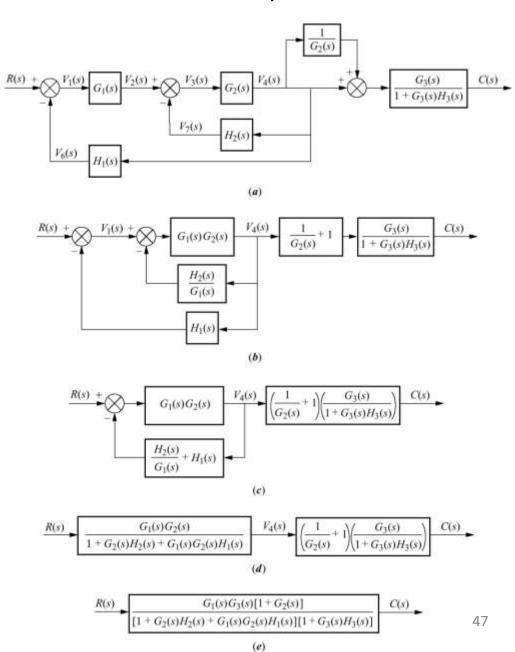

Second-order feedback control system

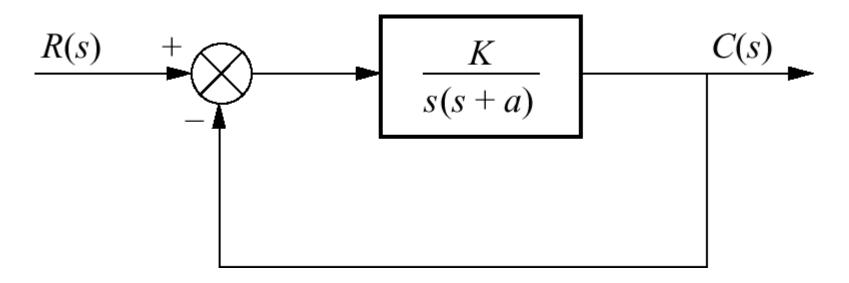

The closed loop transfer function is
$$T(s) = \frac{K}{s^2 + as + K}$$


Note K is the amplifier gain, As K varies, the poles move through the three ranges of operations OD, CD, and UD

0<K<a²/4 system is over damped

 $K = a^2/4$ system is critically damped

 $K > a^2/4$ system is under damped

Finding transient response Example 5.3

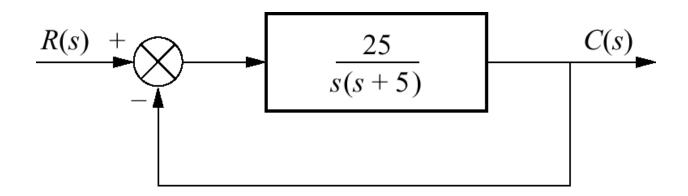

Problem: For the system shown, find peak time, percent overshot, and settling time.

Solution: The closed loop transfer function is
$$T(s) = \frac{25}{s^2 + 5s + 25}$$

And

$$\omega_n = \sqrt{25} = 5$$
 $2\xi\omega_n = 5$ so $\xi = 0.5$


using values for ξ and ω_n and equation in chapter 4 we find

$$T_{p} = \frac{\Box \pi}{\omega_{n}} = 0.726 \qquad \text{sec}$$

$$\% OS = e^{-\xi \pi / \sqrt{-\xi^{2}}} X \ 100 = 16.303$$

$$T_{s} = \frac{4}{\xi \omega_{n}} = 1.6 \quad \text{sec}$$

Gain design for transient response Example 5.4

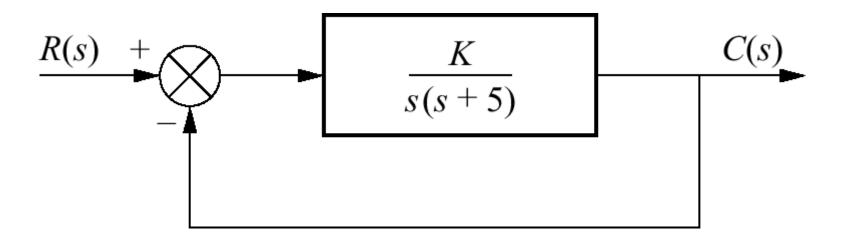

Problem: Design the value of gain K, so that the system will respond with a 10% overshot.


overshot. Solution: The closed loop transfer function is
$$T(s) = \frac{K}{s^2 + 5s + K}$$
 $\omega_n = \sqrt{K}$ and $2\xi\omega_n = 5$ thus $\xi = \frac{5}{2\sqrt{K}}$

For 10% OS we find $\xi = 0.591$


We substitute this value in previous equation to find K = 17.9

Signal-flow graph components:

- a. system;
- b. signal;
- c. interconnection of systems and signals

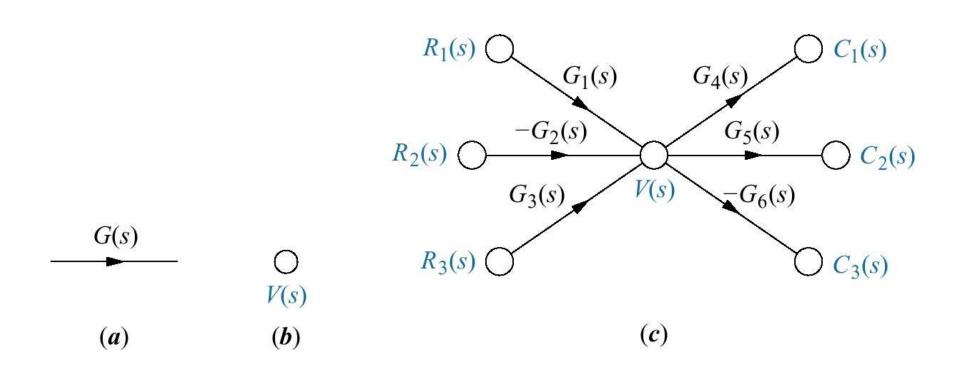


Building signal-flow graphs

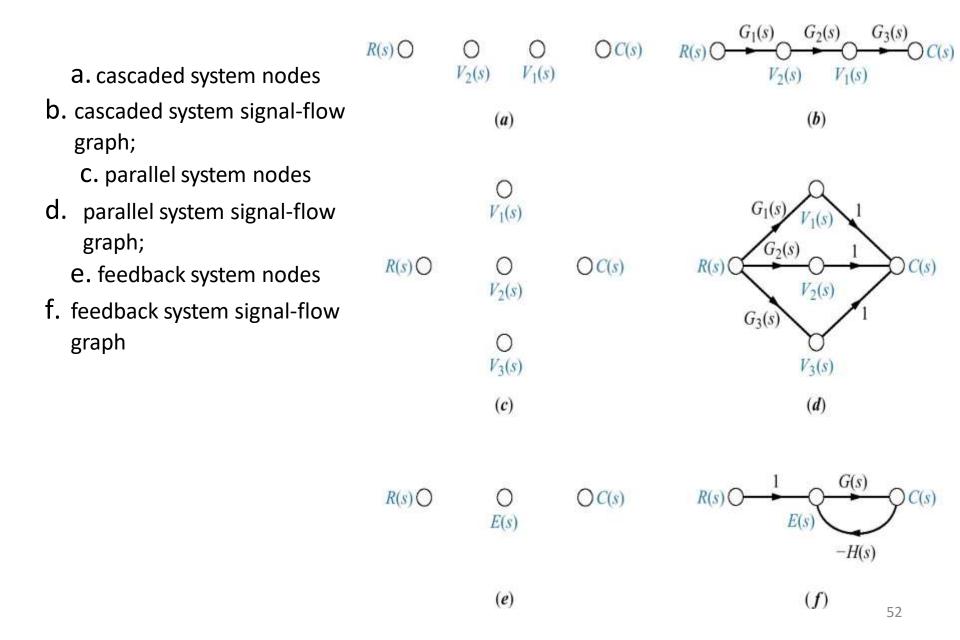

Converting a block diagram to a signal-flow graph


Problem: Convert the block diagram to a signal-flow graph.

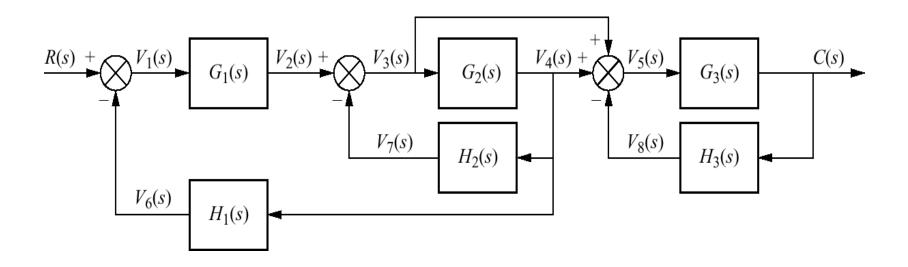



Converting a block diagram to a signal-flow graph

Signal-flow graph development:


- a. signal nodes;
- b. signal-flow graph;
- c. simplified signal-flow graph

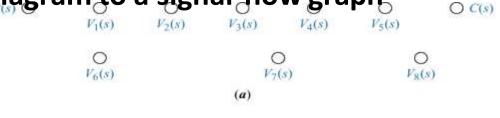

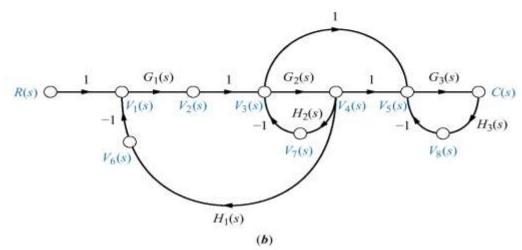

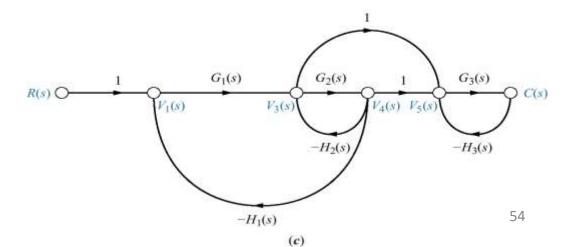

Mason's rule - Definitions

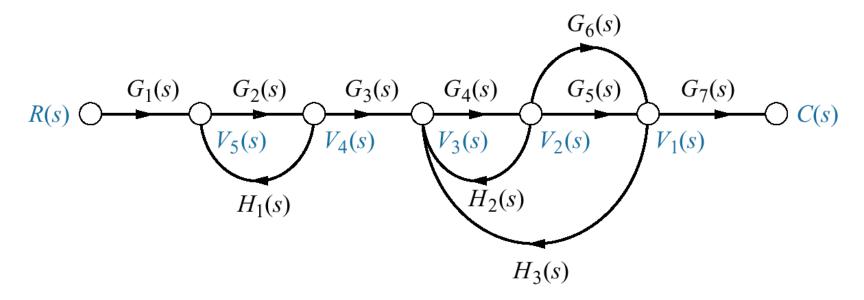

Loop gain: The product of branch gains found by traversing a path that starts at a node and ends at the same node, following the direction of the signal flow, without passing through any other node more than once. $G_2(s)H_2(s)$, $G_4(s)H_2(s)$, $G_4(s)G_5(s)H_3(s)$, $G_4(s)G_6(s)H_3(s)$

Forward-path gain: The product of gains found by traversing a path from input node to output node in the direction of signal flow. $G_1(s)G_2(s)G_3(s)G_4(s)G_5(s)G_7(s)$, $G_1(s)G_2(s)G_3(s)G_4(s)G_5(s)G_7(s)$

Nontouching loops: loops that do not have any nodes in common. $G_2(s)H_1(s)$ does not touch $G_4(s)H_2(s)$, $G_4(s)G_5(s)H_3(s)$, and $G_4(s)G_6(s)H_3(s)$

Nontouching-loop gain: The product of loop gains from nontouching loops taken 2, 3,4, or more at a time.

 $[G_2(s)H_1(s)][G_4(s)H_2(s)], [G_2(s)H_1(s)][G_4(s)G_5(s)H_3(s)], [G_2(s)H_1(s)][G_4(s)G_6(s)H_3(s)]$

Mason's Rule

The Transfer function. C(s)/R(s), of a system represented by a signal-flow graph is

$$G(s) = \frac{C(s)}{R(s)} = \frac{\sum_{k} T_k \Delta_k}{\Delta}$$

Where

K = number of forward paths

 T_k = the kth forward-path gain

 $\Delta = 1 - \text{loop gains} + \text{nontouching-loop gains taken 2 at a time - nontouching-loop gains} \\ \sum_{\text{taken 3 at a tim}} + \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains taken 4 at a } \\ \sum_{\text{time-}} \text{nontouching-loop gains 4 at a } \\ \sum_{\text{time$

 $\Delta_k = - \text{loop gain terms in } \Delta \text{ that touch the } kth \text{ forward path. In other words,} \\ \Delta_k \text{ is for } \Delta \text{ eliminating from } \Delta \text{ those loop gains that touch the } kth \text{ forward path.} \\ \Delta$

Transfer function via Mason's rule

Problem: Find the transfer function for the signal flow graph

Solution:

forward path

 $G_1(s)G_2(s)G_3(s)G_4(s)G_5(s)$

Loop gains

 $G_2(s)H_1(s), G_4(s)H_2(s), G_7(s)H_4(s),$

 $G_2(s)G_3(s)G_4(s)G_5(s)G_6(s)G_7(s)G_8(s)$

Nontouching loops

2at a time

 $G_2(s)H_1(s)G_4(s)H_2(s)$

 $G_2(s)H_1(s)G_7(s)H_4(s)$

 $G_4(s)H_2(s)G_7(s)H_4(s)$

3 at a time $G_2(s)H_1(s)G_4(s)H_2(s)G_7(s)H_4(s)$

 $G_2(s)$ $G_5(s)$ $G_3(s)$ $G_4(s)$ $G_1(s)$ R(s)C(s) $V_2(s)$ $V_4(s)$ $V_3(s)$ $V_1(s)$ $H_1(s)$ $H_2(s)$ $G_8(s)$ $G_6(s)$ $G_7(s)$ $V_6(s)$ $V_5(s)$ $H_4(s)$

Now

 $\Delta = 1 - [G2(s)H1(s) + G_4(s)H_2(s) + G_7(s)H_4(s) + G_2(s)G_3(s)G_4(s)G_5(s)G_6(s)G_7(s)G_8(s)] + [G_2(s)H_1(s)G_4(s)H_2(s) + G_2(s)H_1(s)G_7(s)H_4(s)] + [G_2(s)H_1(s)G_7(s)H_4(s)] + [G_2(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_1(s)G_7(s)H_$

$$\Delta_1$$
 = 1 - G7(s)H4(s)

$$G(s) = \frac{T_1 \Delta_1}{\Delta} = \frac{[G_1(s)G_2(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_3(s)G_$$

Signal-Flow Graphs of State Equations

R(s)

 x_1 = 2 x_1 - 5 x_2 + 3 x_3 + 2r

$$x_{1} = 2x_{1} - 5x_{2} + 3x_{3} + 2r$$


$$x_{2} = -6x_{1} - 2x_{2} + 2x_{3} + 5r$$


$$x_{3}^{\square} = x_{1} - 3x_{2} - 4x_{3} + 7r$$


 $y = -4x_1 + 6x_2 + 9x_3$


a. place nodes;

- b. interconnect state variables and derivatives;
 - c. form dx1/dt;
 - d. form dx2/dt





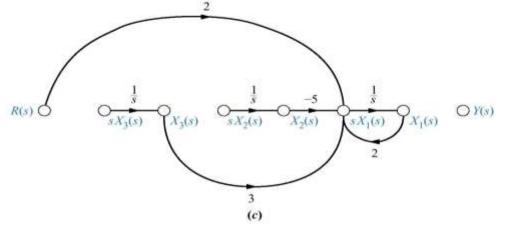


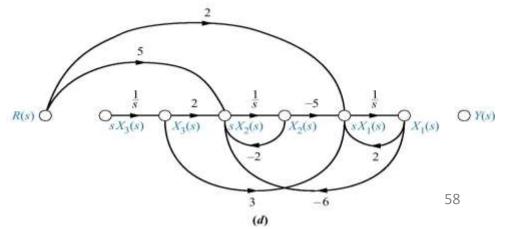


Signal-Flow Graphs of State Equations

(continued)


- e. form dx_3/dt ;
- f. form output

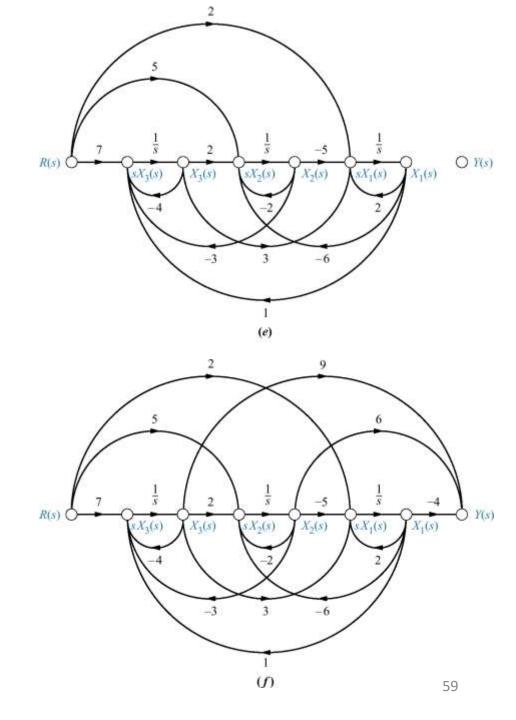


Alternate Representation: Cascade Form

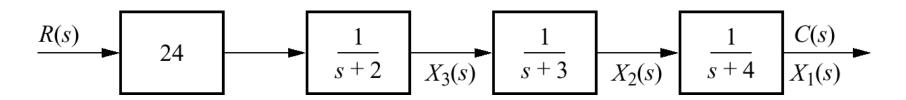



$$\frac{C(s)}{R(s)} = \frac{24}{(s+2)(s+3)(s+4)}$$

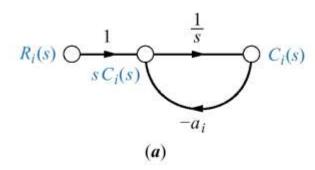

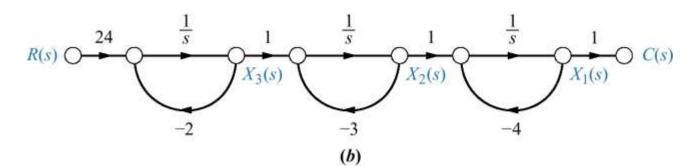

Alternate Representation: Cascade Form

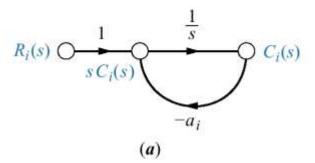

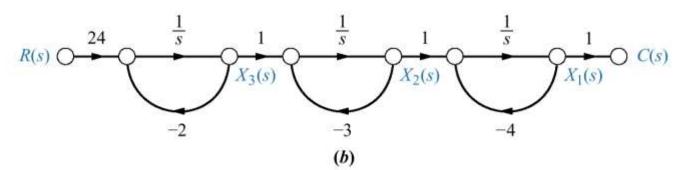

$$X = \begin{bmatrix} -4 & 1 & 0 \\ 0 & -3 & 1 \end{bmatrix} X + \begin{bmatrix} 0 \\ 0 \end{bmatrix} r$$

$$\begin{bmatrix} 0 & 0 & -2 \end{bmatrix}$$

61


$$\frac{C(s)}{R(s)} = \frac{\text{Alternat}_2 e_4 \text{Representation}_1: P_2 \text{arallel F}_2 e_4 \text{m}}{(s+2)(s+3)(s+4)} + \frac{12}{(s+4)}$$

$$x_{1}^{\Pi} = -2x_{1} + 12r$$

$$x_{2}^{\Pi} = -3x_{2} - 24r$$

$$x_{3}^{\Pi} = -4x_{3} + 12r$$

$$y = c(t) = x_{1} + x_{2} + x_{3}$$

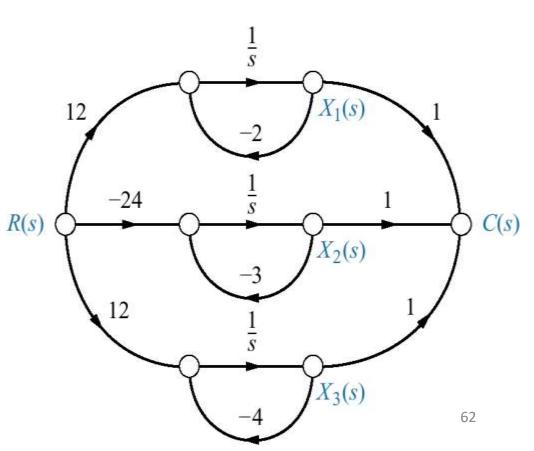

Alternate Representation: Parallel Form Repeated roots


$$\frac{C(s)}{R(s)} = \frac{(s+3)}{(s+1)^2(s+2)} = \frac{2}{(s+1)^2} - \frac{1}{(s+1)} + \frac{1}{(s+2)}$$

$$x_{1}^{\Pi} = -x_{1} + x_{2}$$

$$x_{2}^{\Pi} = x_{2} + 2r$$

$$x_{3}^{\Pi} = -2x_{3} + r$$


$$y = c(t) = x_{1} - 1/2x_{2} + x_{3}$$

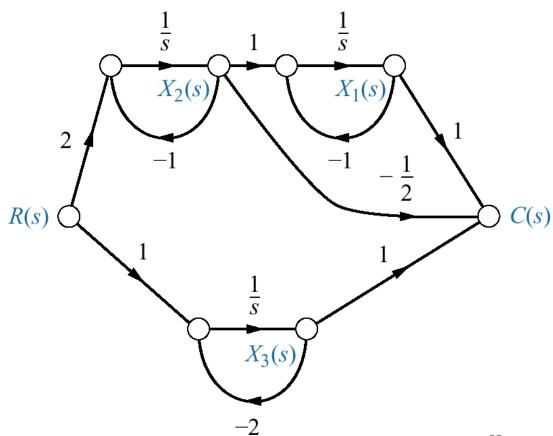

Alternate Representation: controller canonical form

$$G(s) = C(s)/R(s) = (s^2 + 7s + 2)/(s^3 + 9s^2 + 26s + 24)$$

This form is obtained from the phase-variable form simply by ordering the phase variable in reverse order

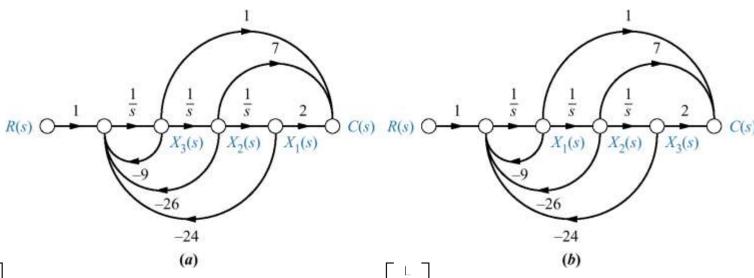

$$\begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -24 & -26 & -9 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} r$$

$$\begin{bmatrix} x_1 \\ 1 \\ y_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} r$$

$$y = \begin{bmatrix} 2 & 7 & 1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$$

$$\begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -24 & -26 & -9 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} r$$

$$\begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} -9 & -26 & -24 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix} r$$

$$y = \begin{bmatrix} 1 & 7 & 2 \end{bmatrix} \begin{vmatrix} x_1 \\ x_2 \\ x_3 \end{vmatrix}$$

Alternate Representation: controller canonical form

System matrices that contain the coefficients of the characteristic polynomial are called *companion matrices* to the characteristic polynomial.

Phase-variable form result in lower companion matrix

Controller canonical form results in upper companion matrix

Alternate Representation: observer canonical form

Observer canonical form so named for its use in the design of observers

G(s) = C(s)/R(s) =
$$(s^2 + 7s + 2)/(s^3 + 9s^2 + 26s + 24)$$


= $(1/s+7/s^2+2/s^3)/(1+9/s+26/s^2+24/s^3)$

Cross multiplying

$$(1/s+7/s^2+2/s^3)R(s) = (1+9/s+26/s^2+24/s^3)C(s)$$

And
$$C(s) = 1/s[R(s)-9C(s)] + 1/s^2[7R(s)-26C(s)] + 1/s^3[2R(s)-24C(s)]$$


= 1/s{ [R(s)-9C(s)] + 1/s {[7R(s)-26C(s)]+1/s [2R(s)-24C(s)]}}

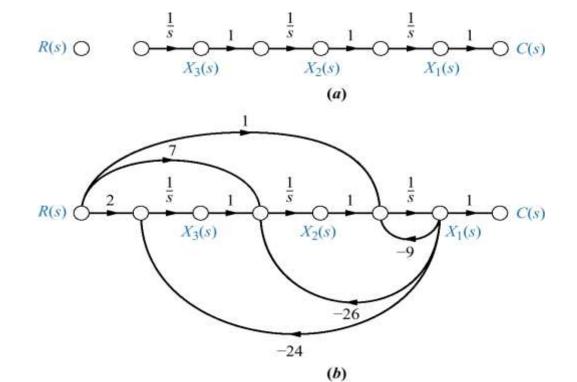

Alternate Representation: observer canonical form


Note that the observer form has A matrix that is transpose of the controller canonical form, B vector is the transpose of the controller C vector, and C vector is the transpose of the controller B vector. The 2 forms are called duals.


Feedback control system for Example 5.8

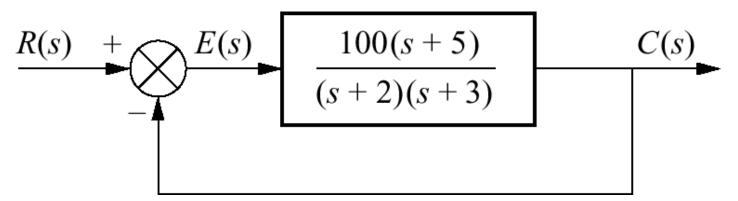


Problem Represent the feedback control system shown in state space. Model the forward transfer function in cascade form.

Solution first we model the forward transfer function as in (a), Second we add the feedback and input paths as shown in (b) complete system. Write state equations

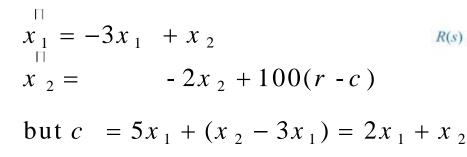

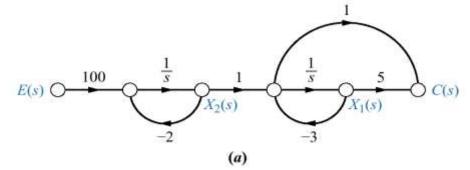

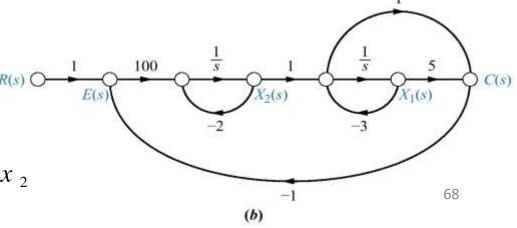

Feedback control system for Example 5.8

$$x_{1}^{\perp} = -3x_{1} + x_{2}$$

$$x_{2} = -200x_{1} - 102x_{2} + 100r$$


$$y = c(t) = 2x_{1} + x_{2}$$

$$X = \begin{bmatrix} -3 & 1 \\ -200 & -102 \end{bmatrix} X + \begin{bmatrix} 0 \\ 100 \end{bmatrix} r$$

$$y = \begin{bmatrix} 2 & 1 \end{bmatrix} X$$

$$C(s)/R(s) = (s+3)/[(s+4)(s+6)].$$

Note: y = c(t)

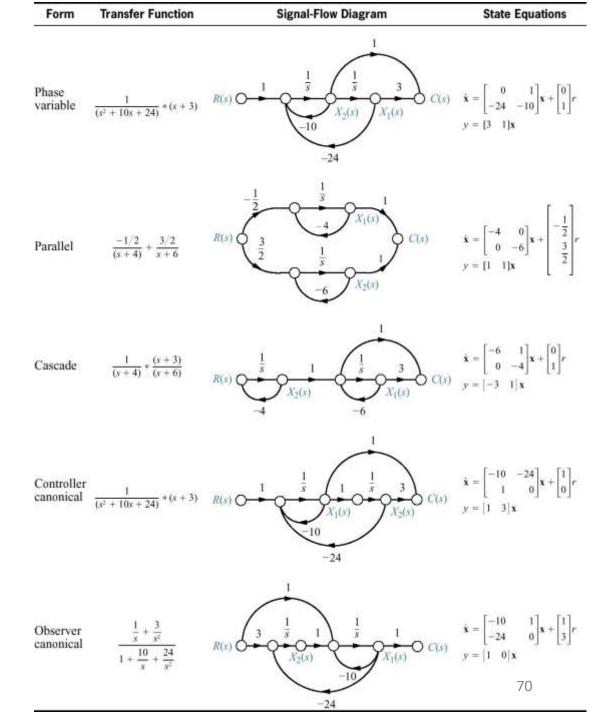

UNIT-III TIME RESPONSE ANALYSIS

Transient vs Steady-State

The output of any differential equation can be broken up into two parts,

- •a transient part (which decays to zero as t goes to infinity) and
- a **steady-state part** (which does not decay to zero as t goes to infinity).

$$y(t) = y_{tr}(t) + y_{ss}(t)$$

$$\lim_{t \to 0} y_{tr}(t) = 0$$

Either part might be zero in any particular case.

Prototype systems

```
1<sup>st</sup> Order system
```

$$\dot{c}(t) + \frac{1}{\tau}c(t) = kr(t)$$

2nd order system

$$\ddot{c}(t) + 2\zeta\omega_n\dot{c}(t) + \omega_n^2c(t) = kr(t)$$

Agenda:

transfer function

response to test signals

impulse

step

ramp

parabolic

sinusoidal

1st order system

 $G(s) = \frac{C(s)}{R(s)} = \frac{1/T}{s + 1/T}$

Impulse response

Step response

Ramp response

Relationship between impulse, step and ramp

Relationship between impulse, step and ramp responses

$$r(t) = \delta(t), R(s) = 1, \quad c_{\delta}(t) = \frac{1}{T} e^{-t/T} 1(t)$$
 $r(t) = 1(t), R(s) = \frac{1}{s}, \quad c_{step}(t) = 1 - e_{-t/T} 1(t)$

$$r(t) = t1(t), R(s) = \frac{1}{s^2}, \quad c_{ramp}(t) = \left[t - T + Te^{-t/T}\right]1(t)$$

1st Order system

Prototype parameter: Time constant

Relate problem specific parameter to prototype parameter.

Parameters: problem specific constants. Numbers that do not change with time, but do change from problem to problem.

We learn that the time constant defines a problem specific time scale that is more convenient than the arbitrary time scale of seconds, minutes, hours, days, etc, or fractions thereof.

Transient vs Steady state

Consider the impulse, step, ramp responses computed earlier. Identify the steady state and the transient parts.

1st order system

Consider the impulse, step, ramp responses computed earlier. Identify the steady state and the transient parts.

Impulse response

Step response Ramp response
$$G(s) = \frac{C(s)}{R(s)} = \frac{1/T}{s+1/T}, \quad T>0$$

Relationship between impulse, step and ramp responses

$$r(t) = \delta(t), R(s) = 1, \quad c_{\delta}(t) = \frac{1}{T} e^{-t/T} 1(t)$$
 $r(t) = 1(t), R(s) = \frac{1}{s}, \quad c_{step}(t) = 1 - e_{-t/T} 1(t)$

$$r(t) = t1(t), R(s) = \frac{1}{s^2}, \quad c_{ramp}(t) = \left[t - T + Te^{-t/T}\right]1(t)$$

Compare steady-state part to input function, transient part to TF.

2nd order system
$$G(s) = \frac{C(s)}{R(s)} = \frac{\Box_n}{s^2 + 2\zeta\omega_n s + \omega_n^2}$$

Over damped

• (two real distinct roots = two 1st order systems with real poles)

Critically damped

• (a single pole of multiplicity two, highly unlikely, requires exact matching)

Underdamped

• (complex conjugate pair of poles, oscillatory behavior, most common) step response

$$c_{step}(t) = K \left[1 - \frac{e^{-\zeta \omega_n t}}{\sqrt{1 - \zeta^2}} \sin \left(\omega_d t + \tan^{-1} \left(\sqrt{1 - \zeta^2} / \zeta \right) \right) \right] 1(t)$$

$$c_{\delta}(t) = K \left[\frac{\omega_n}{\sqrt{1 - \zeta^2}} e^{-\zeta \omega_n t} \sin \left(\omega_d t \right) \right] 1(t)$$

2nd Order System

Prototype parameters:
undamped natural frequency,
damping ratio

Relating problem specific parameters to prototype parameters

Transient vs Steady state

Consider the step, responses computed earlier. Identify the steady state and the transient parts.

2nd order system
$$G(s) = \frac{C(s)}{R(s)} = \frac{\Box_n}{s^2 + 2\zeta\omega_n s + \omega_n^2}$$

Over damped

• (two real distinct roots = two 1st order systems with real poles)

Critically damped

• (a single pole of multiplicity two, highly unlikely, requires exact matching)

Underdamped

 (complex conjugate pair of poles, oscillatory behavior, most common) step response

$$c_{step}(t) = K \left[1 - \frac{e^{-\zeta \omega_n t}}{\sqrt{1 - \zeta^2}} \sin \left(\omega_d t + \tan^{-1} \left(\sqrt{1 - \zeta^2} / \zeta \right) \right) \right] 1(t)$$

$$c_{\delta}(t) = K \left[\frac{\omega_n}{\sqrt{1 - \zeta^2}} e^{-\zeta \omega_n t} \sin \left(\omega_d t \right) \right] 1(t)$$
₈₁

Use of Prototypes

Too many examples to cover them all
We cover important prototypes
We develop intuition on the prototypes
We cover how to convert specific examples to prototypes
We transfer our insight, based on the study of the prototypes to the specific situations.

Transient-Response Spedifications

- 1. Delay time, t_d : The time required for the response to reach half the final value the very first time.
- 2. Rise time, t_r : the time required for the response to rise from 10% to 90% (common for overdamped and 1st order systems); 5% to 95%; or 0% to 100% (common for underdamped systems); of its final value
- 1. Peak time, t_p :
- 2. Maximum (percent) overshoot, M_p :
- 3. Settling time, t_s

Derived relations for 2nd Order Systems

$$\omega_d = \omega_n \sqrt{1 - \zeta^2}$$

$$\omega = \zeta \omega_n$$

$$t_{r} = \frac{\pi - \beta}{\omega_{d}} \qquad t_{p} = \frac{\pi}{\omega_{d}}$$

$$\omega_{d}$$

$$\beta = \tan^{-1} \left(\frac{\omega_d}{\sigma} \right)$$

See book for details. (Pg. 232)

$$M_p = e^{-\sqrt{1-\zeta^2}} \times 100\%$$

$$t_s = 4T = \frac{4}{o} = \frac{4}{\zeta \omega_n}$$
 2% $t_s = 3T = \frac{3}{o} = \frac{3}{\zeta \omega_n}$ 5%

Allowable M_p determines damping ratio.

Settling time then determines undamped natural frequency.

Theory is used to derive relationships between design specifications and prototype parameters.

Which are related to problem parameters.

Higher order system

PFEs have linear denominators.

- each term with a real pole has a time constant
- each complex conjugate pair of poles has a damping ratio and an undamped natural frequency.

Proportional control of plant w integrator

$$G_C(s) = K_p$$
, $G(s) = \frac{1}{s(Js+b)}$

Integral control of Plant w disturbance

$$G_C(s) = \frac{K}{s}, \quad G(s) = \frac{1}{s(Js+b)}$$

Proportional Control of plant w/o integrator

$$G_C(s) = K, \quad G(s) = \frac{1}{Ts+1}$$

Integral control of plant w/o integrator

$$G_C(s) = \frac{K}{s}, \quad G(s) = \frac{1}{Ts+1}$$

UNIT-IV STABILITY ANALYSIS IN S- DOMAIN

Routh's Stability Criterion

How do we determine stability without finding all poles?

Actual poles provide more info than is needed.

All we need to know if any poles are in LHP.

Routh's stability criterion (Section 5-7).

$$q(s) = s^4 + 2s^3 + 3s^2 4s + 5$$

$$q(s) = s^3 + 2s^2 + s + 2$$

$$q(s) = s^5 + 2s^4 + 24s^3 + 48s^2 - 25s - 50$$

What values of K produce a stable system?

$$G(s) = \frac{K}{s(s^2 + s + 1)(s + 2)}, \quad T(s) = \frac{G(s)}{1 + G(s)}$$

The Stability of Linear Feedback Systems

The issue of ensuring the stability of a closed-loop feedback system is central to control system design. Knowing that an unstable closed-loop system is generally of no practical value, we seek methods to help us analyze and design stable systems. A stable system should exhibit a bounded output if the corresponding input is bounded. This is known as bounded-input, bounded-output stability and is one of the main topics of this chapter.


The stability of a feedback system is directly related to the location of the roots of the characteristic equation of the system transfer function. The Routh–Hurwitz method is introduced as a useful tool for assessing system stability. The technique allows us to compute the number of roots of the characteristic equation in the right half-plane without actually computing the values of the roots. Thus we can determine stability without the added computational burden of determining characteristic root locations. This gives us a design method for determining values of certain system parameters that will lead to closed-loop stability. For stable systems we will introduce the notion of relative stability, which allows us to characterize the degree of stability.

The Concept of Stability


A stable system is a dynamic system with a bounded response to a bounded input.

Absolute stability is a stable/not stable characterization for a closed-loop feedback system. Given that a system is stable we can further characterize the degree of stability, or the relative stability.

The Concept of Stability

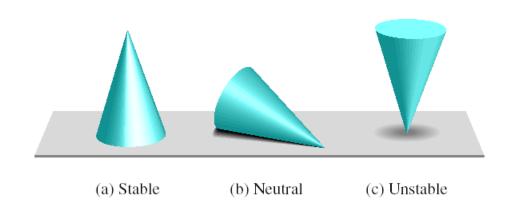

The concept of stability can be illustrated by a cone placed on a plane horizontal surface.

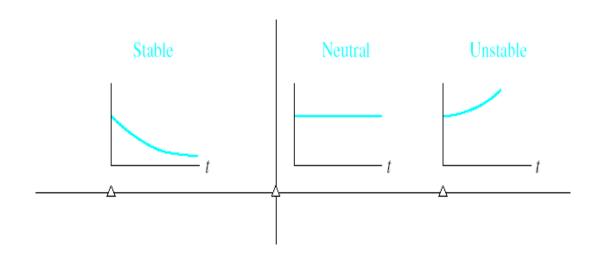


A necessary and sufficient condition for a feedback system to be stable is that all the poles of the system transfer function have negative real parts.

A system is considered marginally stable if only certain bounded inputs will result in a bounded output.

It was discovered that all coefficients of the characteristic polynomial must have the same sign and non-zero if all the roots are in the left-hand plane.

These requirements are necessary but not sufficient. If the above requirements are not met, it is known that the system is unstable. But, if the requirements are met, we still must investigate the system further to determine the stability of the system.

The Routh-Hurwitz criterion is a necessary and sufficient criterion for the stability of linear systems.

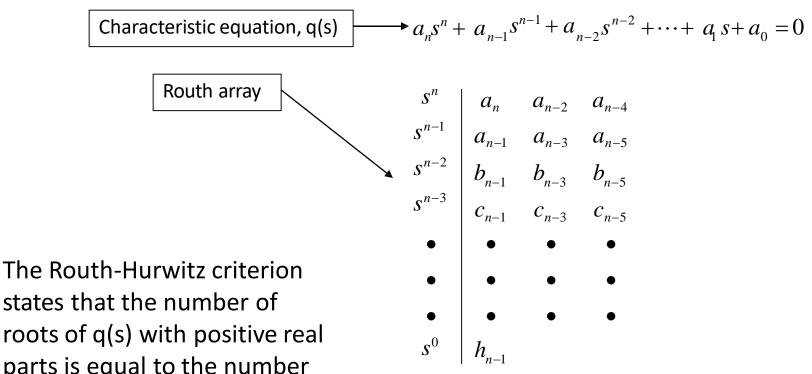

states that the number of roots of q(s) with positive real parts is equal to the number of changes in sign of the first column of the Routh array.

$$b_{n-1} = \frac{(a_{n-1})(a_{n-2}) - a_n(a_{n-3})}{a_{n-1}} = \frac{-1}{a_{n-1}} \begin{vmatrix} a_n & a_{n-2} \\ a_{n-1} & a_{n-3} \end{vmatrix}$$

$$b_{n-3} = \frac{-1}{a_{n-1}} \begin{vmatrix} a_{n-2} & a_{n-4} \\ a_{n-1} & a_{n-3} \end{vmatrix}$$

$$c_{n-1} = \frac{-1}{b_{n-1}} \begin{vmatrix} a_{n-1} & a_{n-3} \\ b_{n-1} & b_{n-3} \end{vmatrix}$$
96

Case One: No element in the first column is zero.

Example 6.1 Second-order system

The Characteristic polynomial of a second-order system is:

$$q(s) = a_2 \cdot s^2 + a_1 \cdot s + a_0$$

The Routh array is written as:

$$\begin{vmatrix}
 s^2 & a_2 & a_0 \\
 s^1 & a_1 & 0 \\
 s^0 & b_1 & 0
 \end{vmatrix}$$

w here:

$$b_1 = \frac{a_1 \cdot a_0 - (0) \cdot a_2}{a_1} = a_0$$

Theref ore the requirement for a stable second-order system is simply that all coeff icients be positive or all the coefficients be negative.

Case Two: Zeros in the first column while some elements of the row containing a zero in the first column are nonzero.

If only one element in the array is zero, it may be replaced with a small positive number ϵ that is allowed to approach zero after completing the array.

$$q(s) s^5 + 2s^4 + 2s^3 + 4s^2 + 11s + 10$$

The Routh array is then:

w here:

$$b_1 = \frac{2 \cdot 2 - 1 \cdot 4}{2} = 0 - \varepsilon \qquad c_1 = \frac{4\varepsilon - 2 \cdot 6}{\varepsilon} = \frac{-12}{\varepsilon} \qquad d_1 = \frac{6 \cdot c_1 - 10\varepsilon}{c_1} = 6$$

There are two sign changes in the first column due to the large negative number calculated for c1. Thus, the system is unstable because two roots lie in the right half of the plane.

98

Case Three: Zeros in the first column, and the other elements of the row containing the zero are also zero.

This case occurs when the polynomial q(s) has zeros located sy metrically about the origin of the s-plane, such as $(s+\sigma)(s-\sigma)$ or $(s+j\omega)(s-j\omega)$. This case is solved using the auxiliary polynomial, U(s), w hich is located in the row above the row containing the zero entry in the Routh array.

q(s)
$$s^{3} + 2 \cdot s^{2} + 4s + K$$

Routh array: $s^{3} \mid 1 \quad 4$
 $s^{2} \mid 2 \quad K$
 $s^{1} \mid \frac{8-K}{2} \quad 0$
 $s^{0} \mid K \quad 0$

For a stable system we require that 0 < s < 8

For the marginally stable case, K=8, the s^1 row of the Routh array contains all zeros. The auxiliary plynomial comes from the s^2 row.

$$U(s) = 2s^2 + Ks^0 = 2 \cdot s^2 + 8 = 2(s^2 + 4) = 2(s + j \cdot 2)(s - j \cdot 2)$$

It can be proven that U(s) is a factor of the characteristic polynomial:


$$\frac{q(s)}{U(s)} = \frac{s+2}{2}$$
 Thus, when K=8, the factors of the characteristic polynomial are:

$$q(s) (s + 2)(s + i \cdot 2)(s - i \cdot 2)$$

Case Four: Repeated roots of the characteristic equation on the jw-axis.


With simple roots on the jw-axis, the system will have a marginally stable behavior. This is not the case if the roots are repeated. Repeated roots on the jw-axis will cause the system to be unstable. Unfortunately, the routh-array will fail to reveal this instability.

Example 6.4

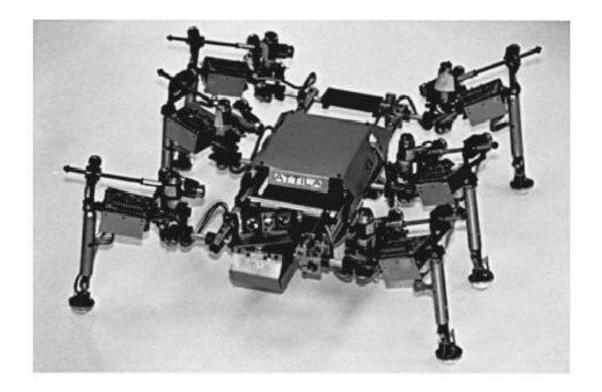

A completely integrated, six-legged, micro robot system. The six-legged design provides maximum dexterity. Legs also provide a unique sensory system for environmental interaction. It is equipped with a sensor network that includes 150 sensors of 12 different types. The legs are instrumented so that the robot can determine the lay of the terrain, the surface texture, hardness, and even color. The gyro-stabilized camera and range finder can be used for gathering data beyond the robot's immediate reach. This high-performance system is able to walk quickly, climb over obstacles, and perform dynamic motions. (Courtesy of IS Robotics Corporation.)

Example 6.5 Welding control

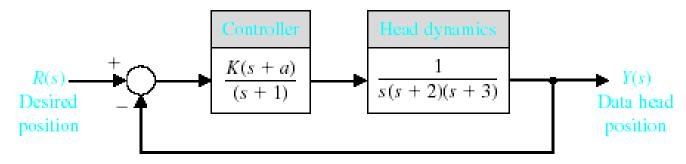

Welding head position control.

Using block diagram reduction we find that: $q(s) = s^4 + 6s^3 + 11s^2 + (K + 6)s + Ka$


where:
$$b_3 = \frac{60 - K}{6}$$
 and $c_3 = \frac{b_3(K + 6) - 6 \cdot Ka}{b_3}$

For the system to be stable both b_3 and c_3 must be positive.

Using these equations a relationship can be determined for K and a .

The Relative Stability of Feedback Control Systems


It is often necessary to know the relative damping of each root to the characteristic equation.
Relative system stability can be measured by observing the relative real part of each root. In this diagram r2 is relatively more stable than the pair of roots labeled r1.

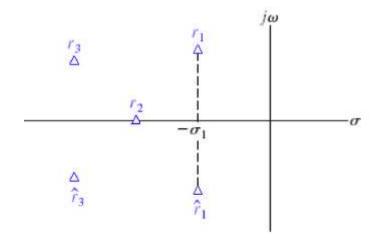

One method of determining the relative stability of each root is to use an axis shift in the s-domain and then use the Routh array as shown in Example 6.6 of the text.

Design Example: Tracked Vehicle Turning Control

Problem statement: Design the turning control for a tracked vehicle. Select K and a so that the system is stable. The system is modeled below.

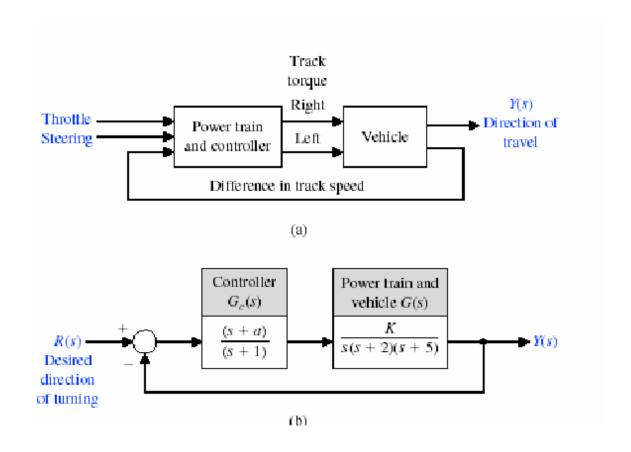

Design Example: Tracked Vehicle Turning Control

The characteristic equation of this system is:

$$1 + G_c \cdot G(s) = 0$$

or

$$1 + \frac{K(s+a)}{s(s+1)(s+2)(s+5)} = 0$$

Thus,

$$s(s + 1)(s + 2)(s + 5) + K(s + a) = 0$$

or

$$s^4 + 8s^3 + 17s^2 + (K + 10)s + Ka = 0$$

To determine a stable region for the system, we establish the Routh array as:

where

$$b_3 = \frac{126 - K}{8}$$
 and $c_3 = \frac{b_3(K + 10) - 8Ka}{b_3}$

Design Example: Tracked Vehicle Turning Control


where

$$b_3 = \frac{126 - K}{8}$$
 and $c_3 = \frac{b_3(K + 10) - 8Ka}{b_3}$


Therefore,

$$K < 126$$
$$K \cdot a > 0$$


$$(K + 10)(126 - K) - 64Ka > 0$$

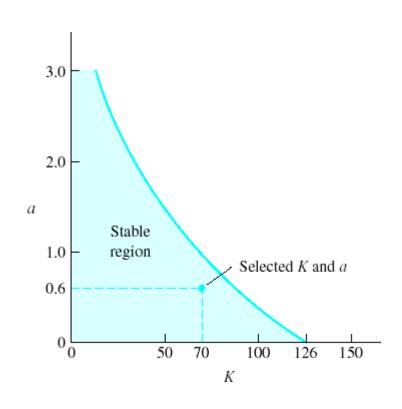

System Stability Using MATLAB

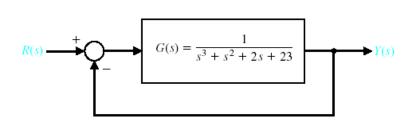

Closed-loop control system with $T(s) = Y(s)/R(s) = 1/(s^3 + s^2 + 2s)$

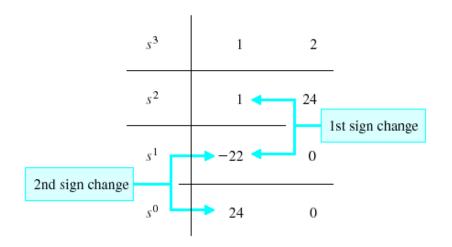



```
>>numg=[1]; deng=[1 1 2 23]; sysg=tf(numg,deng);
>>sys=feedback(sysg,[1]);
>>pole(sys)

ans =

-3.0000
1.0000 + 2.6458i
1.0000 - 2.6458i
Unstable poles
```

System Stability Using MATLAB



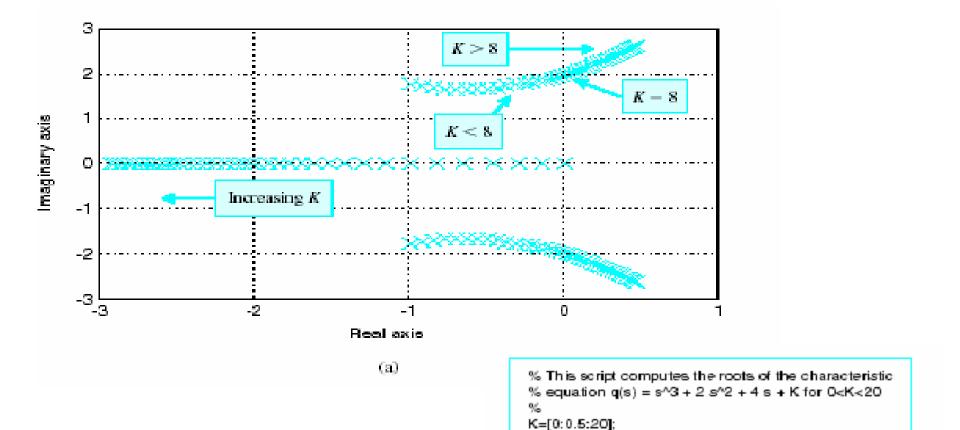

for i=1:length(K)

 $q=[1\ 2\ 4\ K(i)];$

p(:,i)=roots(q);

plot(real(p),imag(p),'x'), grid


xlabel('Real axis'), ylabel('Imaginary axis')

(b) 108

Loop for roots as


a function of K

System Stability Using MATLAB

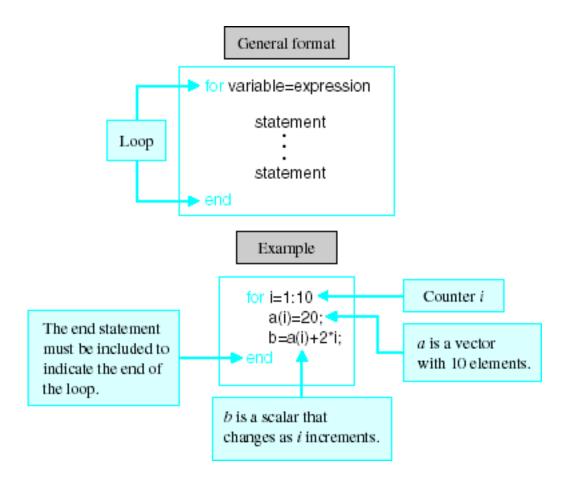

The for function and an illustrative example.

System Stability Using MATLAB

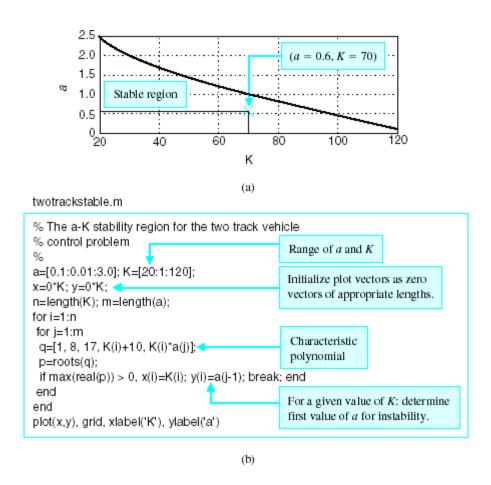

(a) Stability region for a and K for two-track vehicle turning control.(b) MATLAB script.

Root Locus

Motivation

To satisfy transient performance requirements, it may be necessary to know how to choose certain controller parameters so that the resulting closed-loop poles are in the performance regions, which can be solved with Root Locustechnique.

Definition

A graph displaying the roots of a polynomial equation when one of the parameters in the coefficients of the equation changes from 0 to ∞ .

- Rules for Sketching Root Locus
- Examples


Controller Design Using Root Locus

Letting the CL characteristic equation (CLCE) be the polynomial equation, one can use the Root Locus technique to find how a positive controller design parameter affects the resulting CL poles, from which one can choose a right value for the controller parameter.

Poles and zeros

$$F(s) = \frac{k(s-z_1)(s-z_2)\cdots(s-z_m)}{(s-p_1)(s-p_2)\cdots(s-p_n)} \qquad z_1, z_2, \cdots z_m \qquad \text{zeros}$$


$$p_1, p_2, \cdots p_n \qquad \text{poles}$$

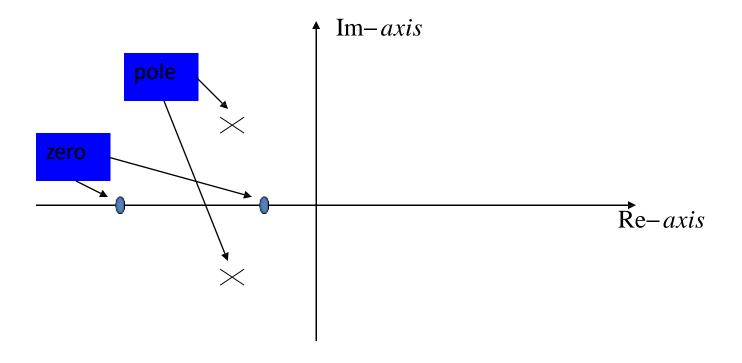

Closed-loop transfer function:

$$T(s) = \frac{\Box_n}{s^2 + 2\zeta\omega_n s + \omega_n^2}$$

$$y(t) = 1 - \frac{e^{-\xi \omega_n t}}{\sqrt{1 - \xi^2}} \sin(\omega_n \sqrt{1 - \xi^2} t + \cos^{-1} \xi)$$

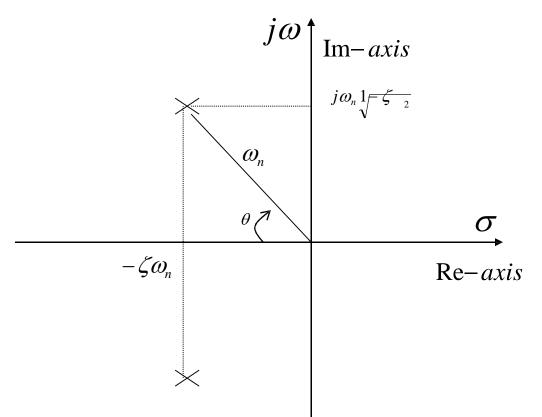



$$\cos \theta = \zeta$$

$$T_p = \frac{\Box \pi}{\omega_n \sqrt{1 - \zeta^2}}$$

$$T_s = \frac{4}{\zeta \omega_n}$$

$$m.o. = e^{\frac{-\zeta \pi}{\sqrt{1 - \zeta^2}}} \times 100\%$$

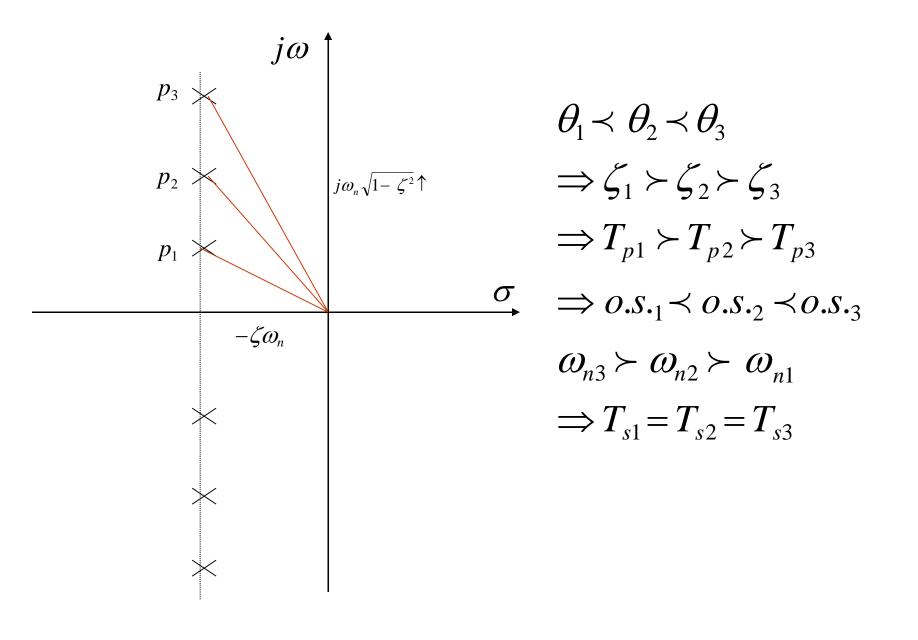

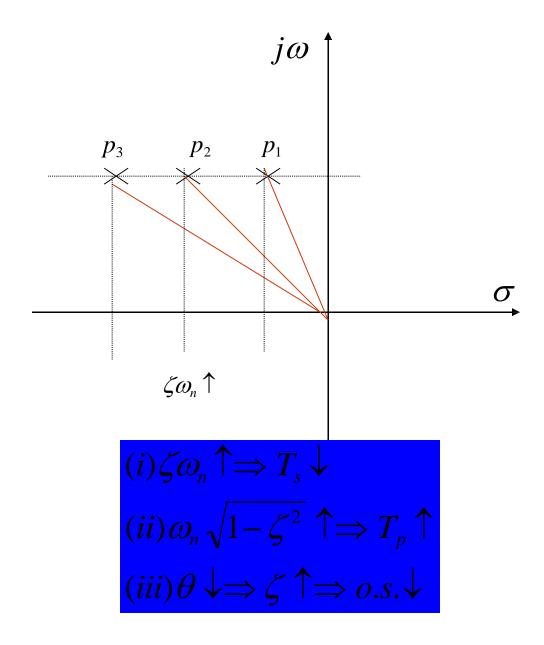

$$\theta_{1} \succ \theta_{2} \succ \theta_{3}$$


$$\Rightarrow \zeta_{1} \prec \zeta_{2} \prec \zeta_{3}$$

$$\Rightarrow o.s._{1} \succ o.s._{2} \succ o.s._{3}$$

$$\Rightarrow T_{p1} = T_{p2} = T_{p3}$$

$$\omega_{n3} \succ \omega_{n2} \succ \omega_{n1}$$

$$\Rightarrow T_{s1} \prec T_{s2} \prec T_{s3}$$

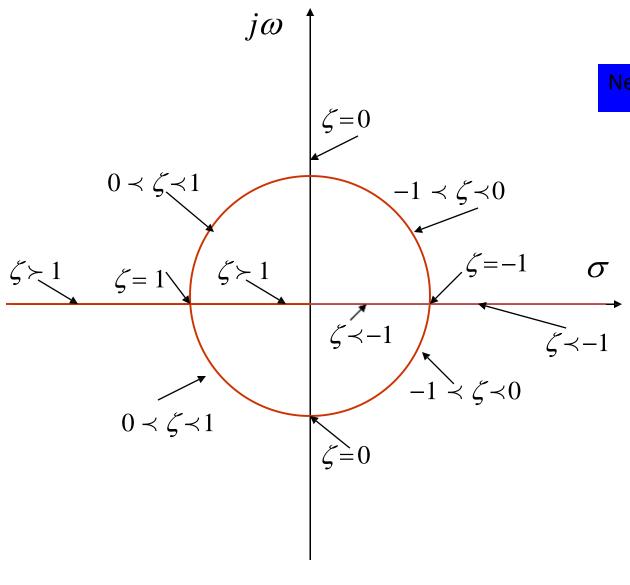

$$\zeta \prec 0$$

Negative damped

$$\zeta = 0$$

Undamped

$$0 \prec \zeta \prec 1$$

Underdamped


$$\zeta = 1$$

Critically damped

$$\zeta \succ 1$$

Overdamped

Root locus

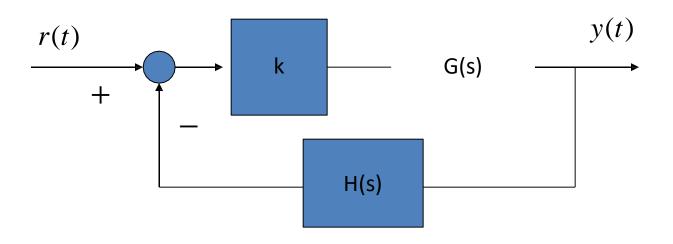

$$T(s) = \frac{y(s)}{R(s)} = \frac{kG(s)}{1 + kG(s)H(s)}$$

$$1 + kG(s)H(s) = 0 \implies poles$$

$$1 + kG(s)H(s) = 0$$

Open loop transfer function

$$\Rightarrow kG(s)H(s) = -1$$

$$\Rightarrow \begin{vmatrix} kG(s)H(s) = 1 \\ kG(s)H(s) = (2n+1)\pi \end{vmatrix}$$

Using open loop transfer function + system parameters to analyze the closed-loop system response

$$k = 0 \rightarrow \infty$$




Draw the s-plan root locus

Root locus properties:

(i) The locus segments are symmetrical about the real axis.

(iii)
$$k = \frac{1}{|G(s)H(s)|}, k = 0 \to \infty$$

$$k = 0, \quad G(s)H(s) \Rightarrow \quad poles$$
 (iii)
$$k \to \infty, \quad G(s)H(s) \Rightarrow \quad zeros$$

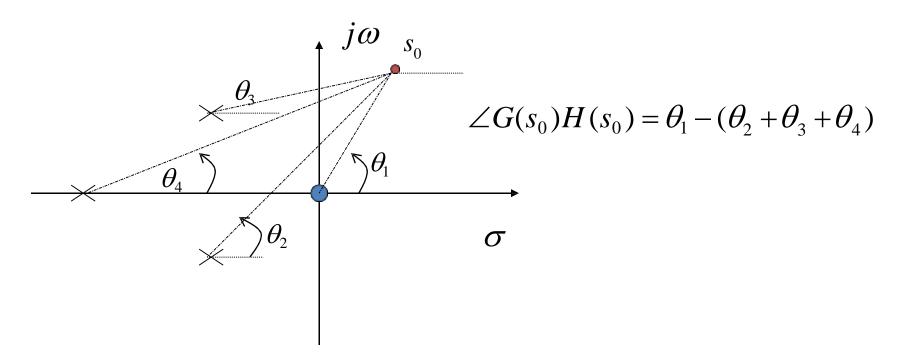

Root locus construction

(i) Loci Branches

each locus from poles

to /æ_ro()s

 $k \to \infty$

if $n \neq m$ for excess zeros or poles, locus segments extend from infinity.


$$(1) \quad n-m > 0$$

n-m branches $\rightarrow \infty$


$$(2) n-m < 0$$

m-n branches $\infty \rightarrow zeros$

(ii) Real axis segments

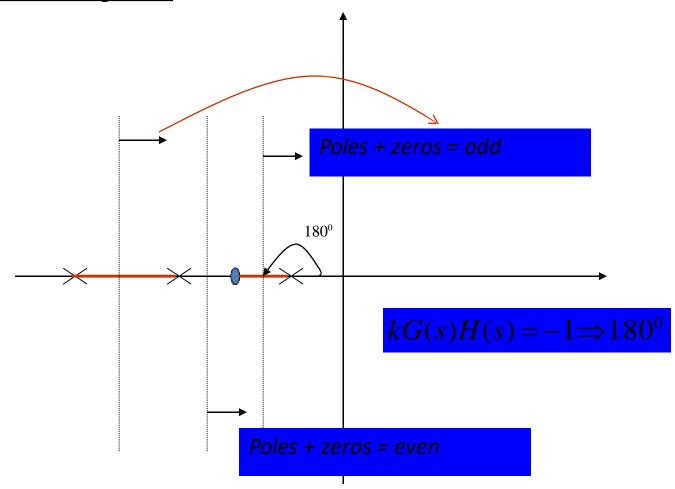

$$\theta_k = \frac{(2k+1)\pi}{n-m}, k = 0,1,2,\cdots$$

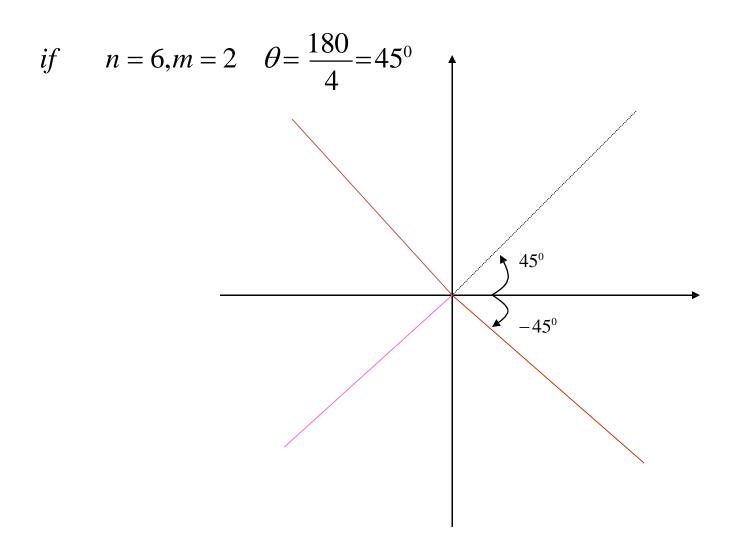

(iv) Centroid of the asymptotes

$$o = \frac{\sum poles - \sum zeros}{n - m}$$

<u>example</u>

$$G(s)H(s) = \frac{3s}{(s+2)(s^2+6s+18)}$$

Zero: 0

Poles: -2, -3+j3, -3-j3

$$o = \frac{(-2-3+j3-3-j3)-0}{3-1} = -4$$

$$\theta = \frac{180}{3 - 1} = 90^{0}$$

(v) Breakaway and entry points

$$\frac{dk}{ds} = 0$$

example
$$kGH = \frac{k}{s(s+1)(s+2)}$$

$$1+kGH=0$$

The characteristic function of closed loop system

$$1 + kGH = \frac{s^3 + 3s^2 + 2s + k}{s(s+1)(s+2)} = 0$$

$$k = -(s^3 + 3s^2 + 2s)$$

$$\frac{dk}{ds} = -3s^2 + 6s + 2 = 0$$

$$s = -0.423, -1.577$$

(vi) Angle of departure and approach

$$\phi_D = 180^0 + \angle G(s)H(s)$$

$$\phi_A = 180^0 - \angle G(s)H(s)$$

example
$$kGH = \frac{k(s+2)}{(s+1+j)(s+1-j)}$$

Angle of departure from the pole:

$$s = -1 - j$$

$$\angle(s+2) - \angle(s+1+j) - \angle(s+1-j) = -180^{0}$$

$$\angle(s+2) - \phi_{D} - \angle(s+1-j) = -180_{0}$$

$$\angle(-1-j+2) - \phi_{D} - \angle(-1-j+1-j) = -180_{0}$$

$$\phi_{D} = 180 + \angle(-1-j+2) - \angle(-1-j+1-j)$$

$$\phi_{D} = 225_{0}$$

example
$$kGH = \frac{k(s+j)(s-j)}{s(s+1)}$$

Angle of approach to the zero: S = j

$$\angle(s+j) + \angle(s-j) - \angle s - \angle(s+1) = -180^{0}$$

$$\angle(s+j) + \phi_{A} - \angle s - \angle(s+1) = -180_{0}$$

$$\angle(j+j) + \phi_{A} - \angle j - \angle(j+1) = -180_{0}$$

$$\phi_{A} = -180_{0} - \angle(j+j) + \angle j + \angle(j+1)$$

$$\phi_{A} = -135_{0}$$

(vii) The cross point of root locus and Im-axis

example
$$kGH = \frac{k}{s(s+3)(s^2+2s+2)}$$

The characteristic function of closed loop system:

$$\begin{array}{c}
R(s) \\
+ \\
\hline
\end{array}$$

$$\begin{array}{c}
k \\
\hline
s(1+0.5s)(1+0.1s)
\end{array}$$

(iii)

$$kGH(s) = \frac{k}{s(1+0.5s)(1+0.1s)}$$

(i)
$$poles = 0, -2, -10$$


 $zeros = \infty, \infty, \infty$

(ii)
$$o = \frac{0 + (-2) + (-10) - 0}{3 - 0} = -4$$
$$\theta_k = \frac{180}{3 - 0} = 60$$

$$s(1+0.5s)(1+0.1s) + k = 0$$
$$0.05s^3 + 0.6s^2 + s + k = 0$$

$$\frac{dk}{ds} = -\frac{d}{ds}(0.05s^3 + 0.6s^2 + s) = 0$$

$$s_1 = -0.945, s_2 = -7.05$$

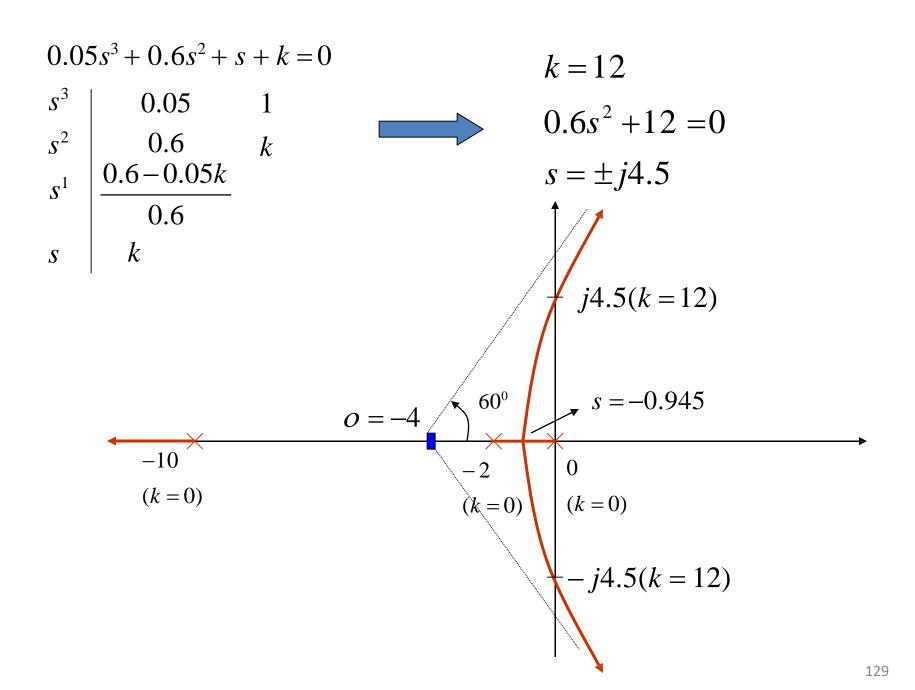


MATLAB method


$$kGH(s) = \frac{k}{s(1+0.5s)(1+0.1s)}$$

$$gh=zpk([],[0-2-10],[1])$$

$$rltool(gh)$$

$$kGH(s) = \frac{k(-3s-9)}{s^4 - s^3 - s^2 - 15s}$$

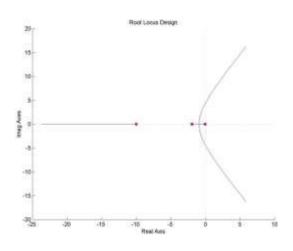

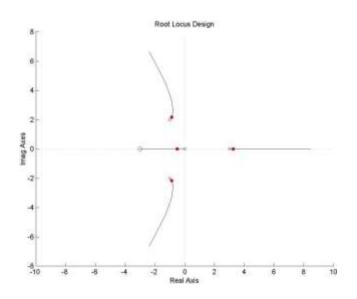

UNIT-V BODE PLOT

Poles and Zeros and Transfer Functions

Transfer Function:

A transfer function is defined as the ratio of the Laplace transform of the output to the input with all initial conditions equal to zero. Transfer functions are defined only for linear time invariant systems.

Considerations:

Transfer functions can usually be expressed as the ratio of two polynomials in the complex variable, s.

Factorization:

A transfer function can be factored into the following form.

$$G(s) = \frac{K(s+z_1)(s+z_2)...(s+z_m)}{(s+p_1)(s+p_2)...(s+p_n)}$$

The roots of the numerator polynomial are called zeros.


The roots of the denominator polynomial are called <u>poles</u>.

Poles, Zeros and the S-Plane

An Example:

You are given the following transfer function. Show the poles and zeros in the s-plane.

$$G(s) = \frac{(s+8)(s+14)}{s(s+4)(s+10)}$$

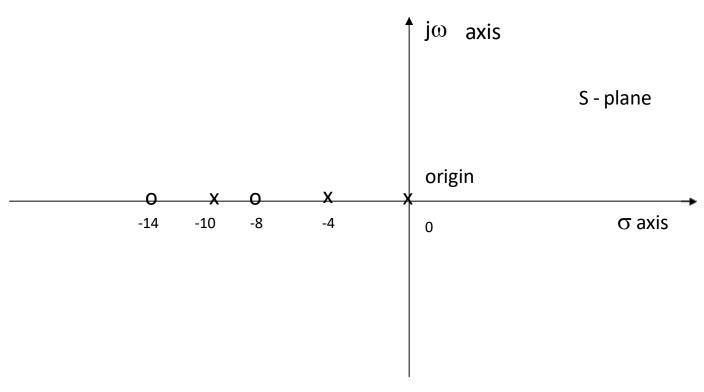

Characterization:

Considering the transfer function of the previous slide. We note that we have 4 different types of terms in the previous general form: These are:

$$K_{B}, \frac{1}{s}, \frac{1}{(s/p+1)}, (s/z+1)$$

Expressing in dB:

Given the tranfer function:

$$G(jw) = \frac{K_{B}(jw/z+1)}{(jw)(jw/p+1)}$$

 $20\log |G(jw)| = 20\log K_{B} + 20\log |(jw/z+1)| - 20\log |jw| - 20\log |jw/p+1|$

Mechanics:


We have 4 distinct terms to consider:

20logK_B

 $20\log|(jw/z + 1)|$

-20log|jw|


 $-20\log|(jw/p+1)|$

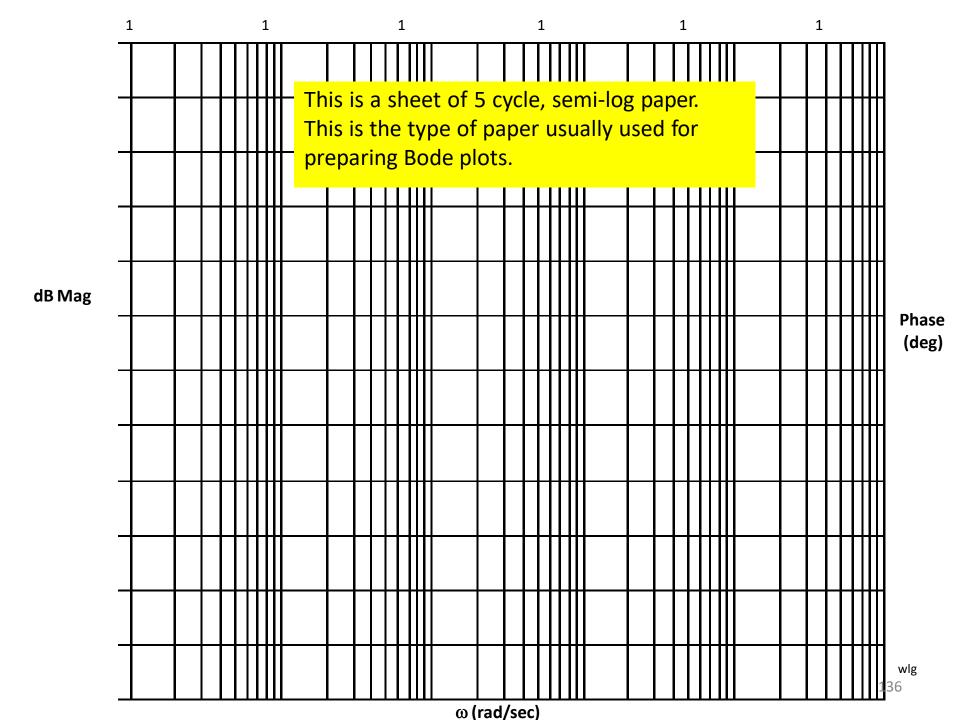

Mechanics:


The gain term, $20logK_{B_n}$ is just so many dB and this is a straight line on Bode paper, independent of omega (radian frequency).

The term, - 20log|jw| = - 20logw, when plotted on semi-log paper is a straight line sloping at -20dB/decade. It has a magnitude of 0 at w = 1.

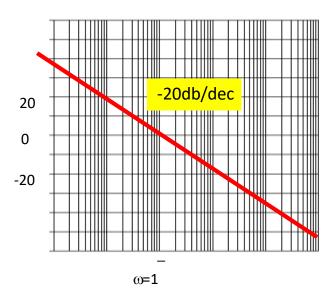


Mechanics:

The term, - $20\log|(jw/p + 1)$, is drawn with the following approximation: If w -20\log|(jw/p + 1)| = 0 dB, a flat line on the Bode. If w > p we use the approximation of $-20\log(w/p)$, which slopes at -20dB/dec starting at w = p. Illustrated below. It is easy to show that the plot has an error of -3dB at w = p and -1 dB at w = p/2 and w = 2p. One can easily make these corrections if it is appropriate.

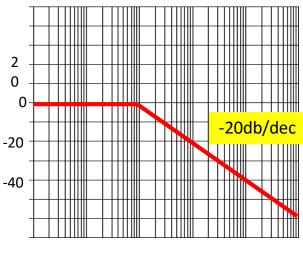

Mechanics:

When we have a term of $20\log|(jw/z + 1)|$ we approximate it be a straight line of slop 0 dB/dec when w < z. We approximate it as $20\log(w/z)$ when w > z, which is a straight line on Bode paper with a slope of + 20dB/dec. Illustrated below.

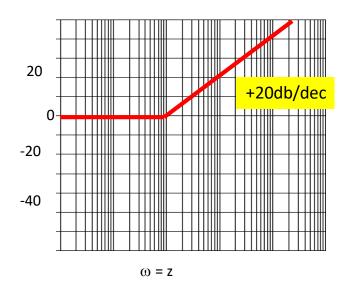

Example 1:

Given:

$$G(jw) = \frac{50,000(jw+10)}{(jw+1)(jw+500)}$$

<u>First</u>: <u>Always</u>, <u>always</u> get the poles and zeros in a form such that the constants are associated with the jw terms. In the above example we do this by factoring out the 10 in the numerator and the 500 in the denominator.

$$G(jw) = \frac{50,000x10(jw/10+1)}{500(jw+1)(jw/500+1)} = \frac{100(jw/10+1)}{(jw+1)(jw/500+1)}$$

Second: When you have neither poles nor zeros at 0, start the Bode at $20\log_{10}K = 20\log_{10}100 = 40$ dB in this case.

Example 1:

(continued)

Third: Observe the order in which the poles and zeros occur.

This is the secret of being able to quickly sketch the Bode.

In this example we first have a pole occurring at 1 which causes the Bode to break at 1 and slope – 20 dB/dec.


Next, we see a zero occurs at 10 and this causes a slope of +20 dB/dec which cancels out the – 20 dB/dec, resulting in a flat line (0 db/dec). Finally, we have a pole that occurs at w = 500 which causes the Bode to slope down at – 20 dB/dec.

We are now ready to draw the Bode.

Before we draw the Bode we should observe the range over which the transfer function has active poles and zeros. This determines the scale we pick for the w (rad/sec) at the bottom of the Bode.

The dB scale depends on the magnitude of the plot and experience is the best teacher here.

Bode Plot Magnitude for 100(1 + jw/10)/(1 + jw/1)(1 + jw/500)

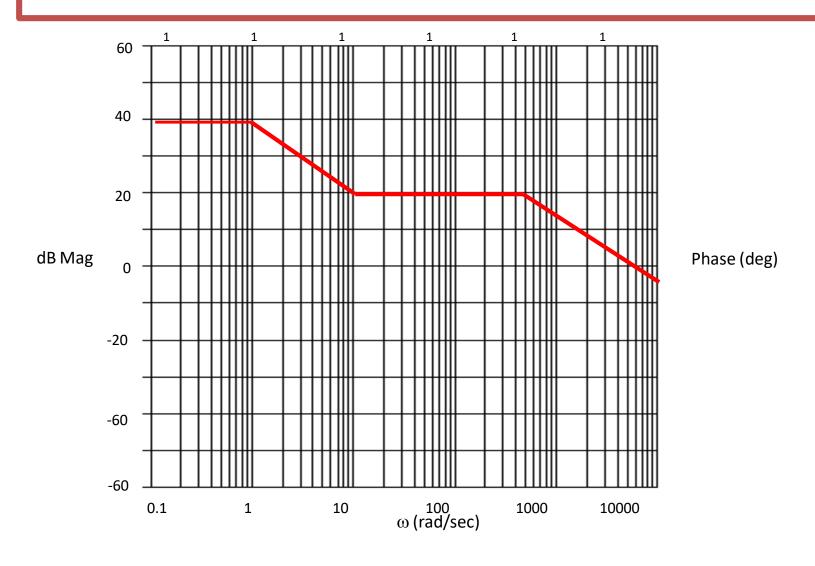

Using Matlab For Frequency Response

<u>Instruction</u>:

We can use Matlab to run the frequency response for the previous example. We place the transfer function in the form:


$$\frac{5000(s+10)}{(s+1)(s+500)} = \frac{[5000s+50000]}{[s^2+501s+500]}$$

The Matlab Program

```
num = [5000 50000];
den = [1 501 500];
Bode (num,den)
```

In the following slide, the resulting magnitude and phase plots (exact) are shown in light color (blue). The approximate plot for the magnitude (Bode) is shown in heavy lines (red). We see the 3 dB errors at the corner frequencies.

Bode Diagrams

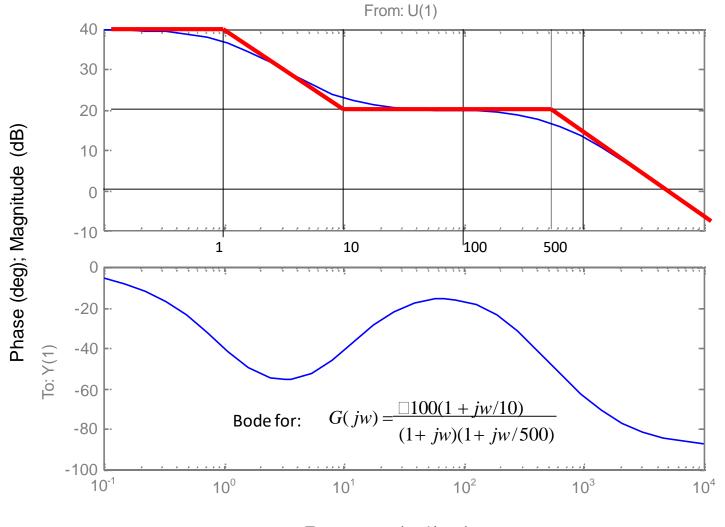

Frequency (rad/sec)

Phase for Bode Plots

Comment:

Generally, the phase for a Bode plot is not as easy to draw or approximate as the magnitude. In this course we will use an analytical method for determining the phase if we want to make a sketch of the phase.

Illustration: Consider the transfer function of the previous example. We express the angle as follows:

$$\angle G(jw) = \tan^{-1}(w/10) - \tan^{-1}(w/1) - \tan^{-1}(w/500)$$

We are essentially taking the angle of each pole and zero. Each of these are expressed as the tan-1(j part/real part)

Usually, about 10 to 15 calculations are sufficient to determine a good idea of what is happening to the phase.

Example 2:


Given the transfer function. Plot the Bode magnitude.

$$G(s) = \frac{100(1+s/10)}{s(1+s/100)^2}$$

Consider first only the two terms of

$$\frac{100}{jw}$$

Which, when expressed in dB, are; 20log100 – 20 logw. This is plotted below.

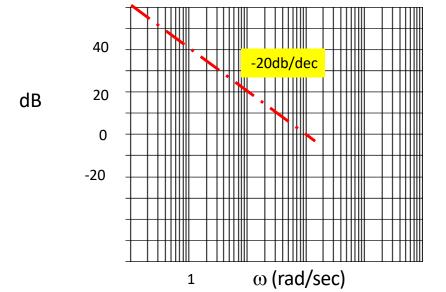


The is a tentative line we use until we encounter the first pole(s) or zero(s) not at the origin.

<u>Example 2</u>: (continued)

dB Mag

The completed plot is shown below.

$$G(s) = \frac{100(1+s/10)}{s(1+s/100)^2}$$

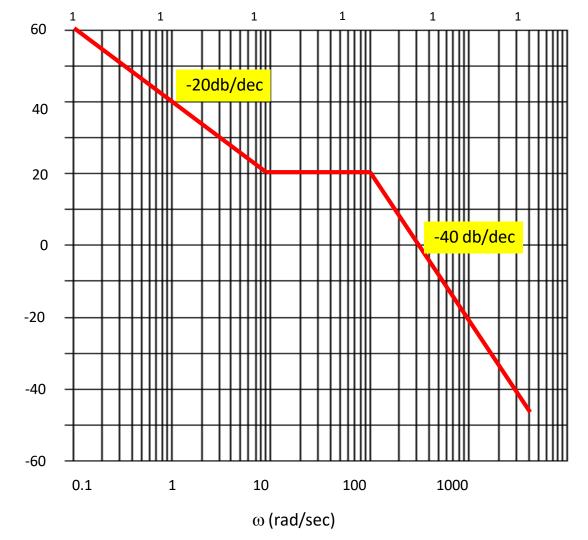

Phase (deg)


$$G(s) = \frac{100(1+s/10)}{s(1+s/100)^2}$$

Example 3:

Given:


$$G(s) = \frac{80(1+jw)^3}{(jw)^3(1+jw/20)^2}$$

 $20\log 80 = 38 \, dB$

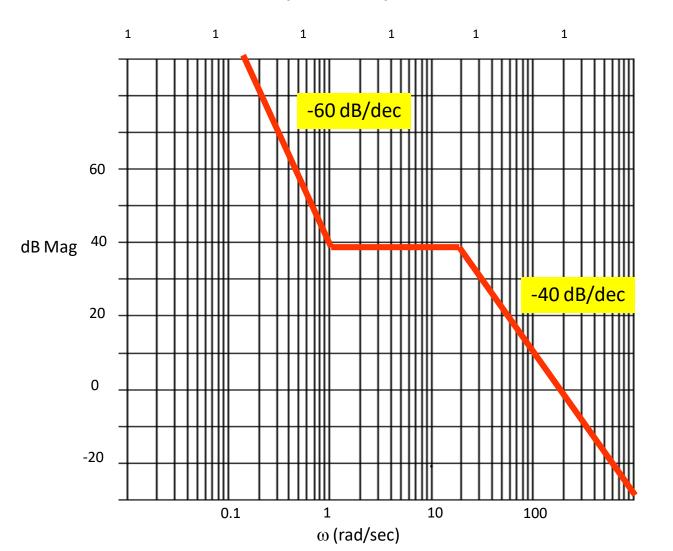

Example 4:

dB Mag

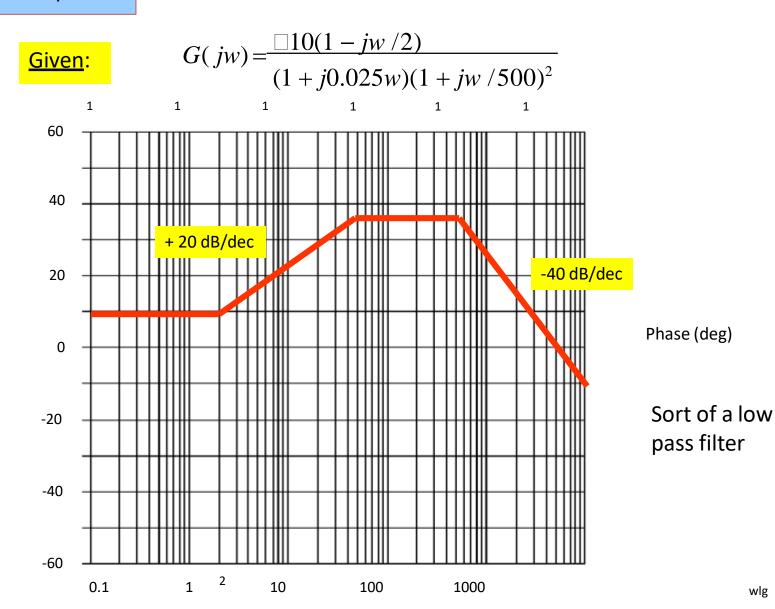


 ω (rad/sec)

Given:

dB Mag

$$G(jw) = \frac{(1+jw/30)^2(1+jw/100)^2}{(1+jw/2)^2(1+jw/1700)^2}$$

<u>Example 5</u>

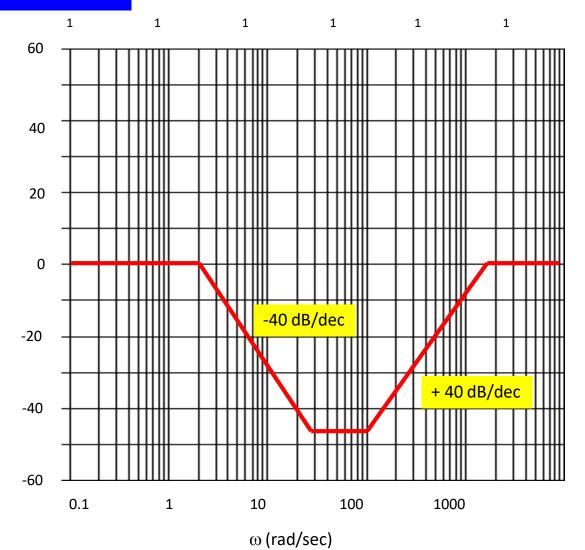

Phase (deg)


Sort of a low pass filter

Given:

problem 11.15 text

Example 6

$$H(jw) = \frac{640(jw+1)(0.01jw+1)}{(jw)^2(jw+10)} = \frac{64(jw+1)(0.01jw+1)}{(jw)^2(0.1jw+1)}$$

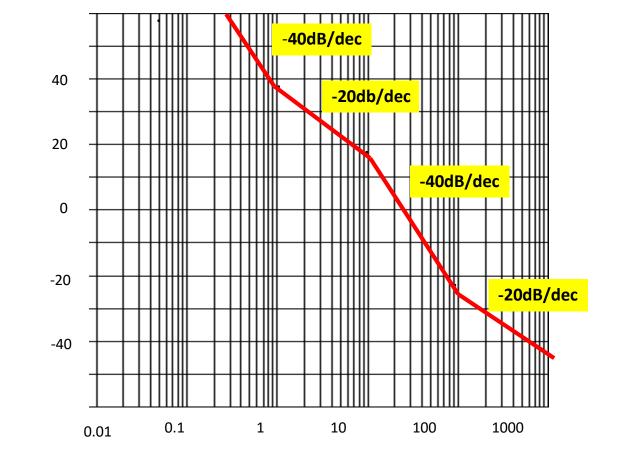


dB mag

Design Problem:

Design a G(s) that has the following Bode plot.

<u>Example 7</u>

dB mag

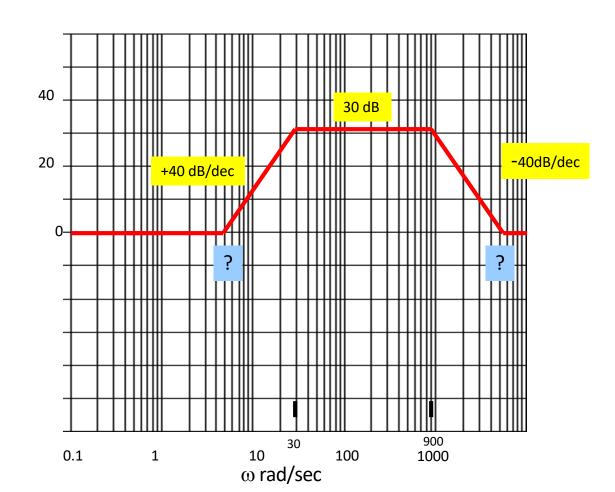

Procedure: The two break frequencies need to be found.

Recall:

$$\#dec = log_{10}[w_2/w_1]$$

Then we have:

$$(\#dec)(40dB/dec) = 30dB$$

$$\log_{10}[w_1/30] = 0.75$$
 $w_1 = 5.33 \text{ rad/sec}$

Also:

$$log_{10}[w_2/900]$$
 (-40dB/dec) = - 30dB

This gives $\underline{w}_2 = 5060 \text{ rad/sec}$

Procedure:

$$G(s) = \frac{(1+s/5.3)^2 (1+s/5060)^2}{(1+s/30)^2 (1+s/900)^2}$$

Clearing:

$$G(s) = \frac{(s+5.3)^2(s+5060)^2}{(s+30)^2(s+900)^2}$$

Use Matlab and conv:

$$N1=(s^2+10.6s+28.1)$$
 $N2=(s^2+10120s+2.56xe^7)$
 $N1=[1\ 10.6\ 28.1]$ $N2=[1\ 10120\ 2.56e+7]$
 $N=conv(N1,N2)$
1 1.86e+3 2.58e+7 2.73e+8 7.222e+8
 S^4 S^3 S^2 S^1 S^0

Procedure:

The final G(s) is given by;


$$G(s) = \frac{(s^4 + 10130.6s^3 + 2.571e^8s^2 + 2.716e^8s + 7.194e^8)}{(s^4 + 1860s^3 + 9.189e^2s^2 + 5.022e^7s + 7.29e^8)}$$

Testing:


We now want to test the filter. We will check it at ω = 5.3 rad/sec And ω = 164. At ω = 5.3 the filter has a gain of 6 dB or about 2. At ω = 164 the filter has a gain of 30 dB or about 31.6.

We will check this out using MATLAB and particularly, Simulink.

Matlab (Simulink) Model:

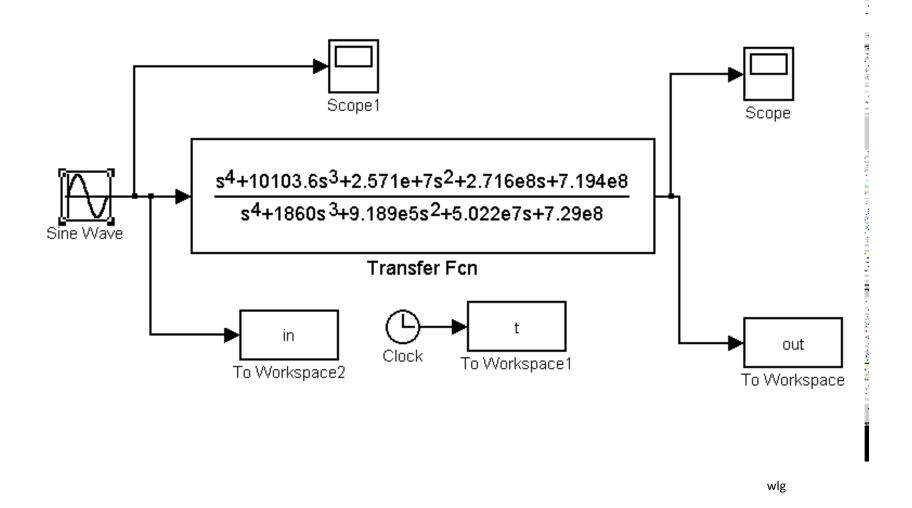


Filter Output at ω = 5.3 rad/sec

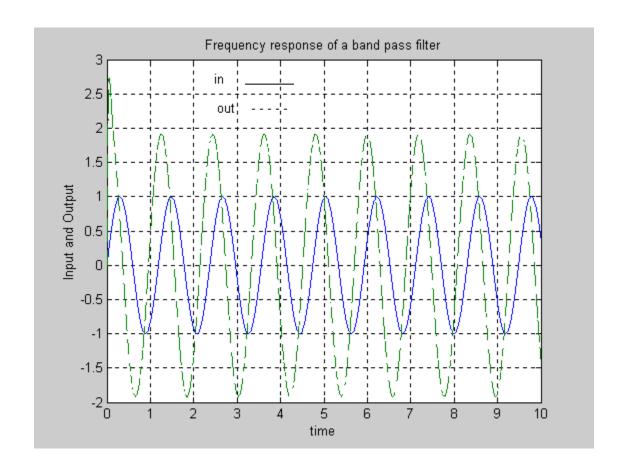

Produced from Matlab Simulink

Filter Output at ω = 70 rad/sec

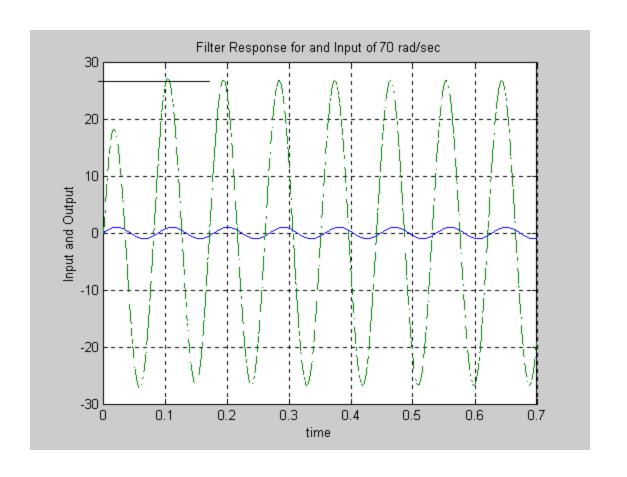


Produced from Matlab Simulink

Reverse Bode Plot

Required:

From the partial Bode diagram, determine the transfer function (Assume a minimum phase system)

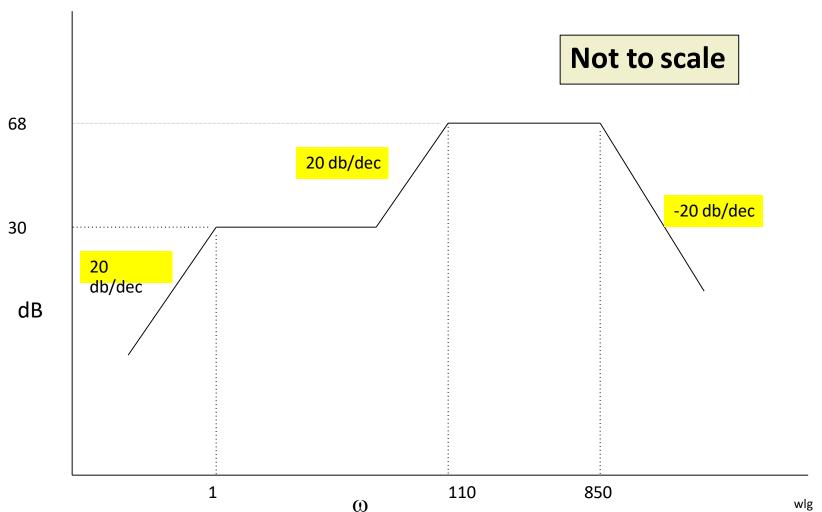


Reverse Bode Plot

Required:

Example 9

From the partial Bode diagram, determine the transfer function (Assume a minimum phase system)

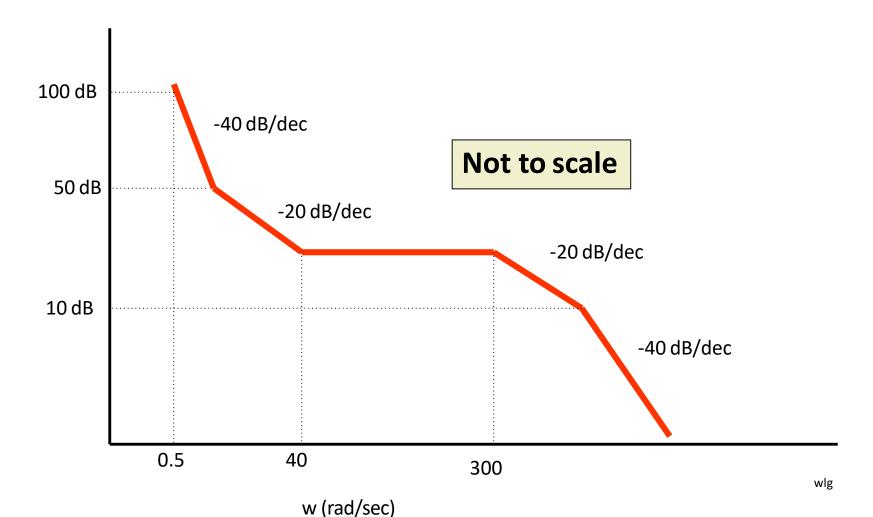

THANK YOU